

**Solid Partner, Flexible Solution.  
Professional LED Lighting Manufacturer since 2007**

# ABOUT US

## COMPANY PROFILE



Standard Electronic Co., Limited (SE.Lighting) is a Chinese National Hi-Tech Enterprise specialized in LED Lighting products, a professional LED Lighting Manufacturer & Supplier since 2007. Our products include DMX Decorative Flood Light, DMX Wall Washer Light, DMX Tube Light, LED Strip, LED Neon Light, LED Tri-Proof Light, LED Linear Light, LED High Bay Light, LED Street Light, LED Aluminum Profiles etc. All these products with good quality, perfect heat dissipation, long life span, low light decay and high lumen efficiency, which are widely used for indoor and outdoor lighting.

**Quality Control:** SE.Lighting's management and operation strictly follow the ISO9001:2015 standard. The key material we source from Philips, Osram, Epistar, MeanWell, Tridonic, Lifud to assure a Steady and Top-Level Quality.

**R&D:** SE.Lighting owns a Lighting & Energy Saving Laboratory with Southwest Jiaotong University (Since 1896), and a Research Base with Shenzhen Polytechnic (Since 1993), these Professor and Doctor provide a strong support to our R&D team, which make the efficient ODM available. Most of the products are own design, which different and competitive in the market.

**Certification:** SE.Lighting's products passed CE, ROHS, ERP, FCC, UKCA, PSE, ETL, DLC, TUV-GS, CB, SAA, C-Tick and RCM, which meet all certification requirement in the world.

**Service:** SE.Lighting started to do export since 2007, some of our colleague with more than 17 years lighting experience, which understand your need and concern well.

**Customer:** 95% of our products exported to more than 100 countries, our valued customer included: Shell Oil, Chrysler Auto, Fiat Auto, Sheraton Hotel, McDonald's, etc.

SE.Lighting is willing and ready to be your best partner. Join us to achieve the mutual benefit, and let's make people's life brighter and more colorful!





# OUR ADVANTAGE

---



17 Years LED Lighting Manufacturer  
& Export Experience.



IES and DIALUX Available,  
Strong R&D Support.



ISO 9001: 2015  
Management



Professional team, to provide  
you with quality services



OEM & ODM Available,  
to Provide Flexible Solution



Professional quality inspector  
quality assurance



# CERTIFICATE



ISO9001:2015



ETL



CE



ROHS



CB



TUV GS



SAA



EN-62471





IP65

# CUSTOMER






# EXHIBITION

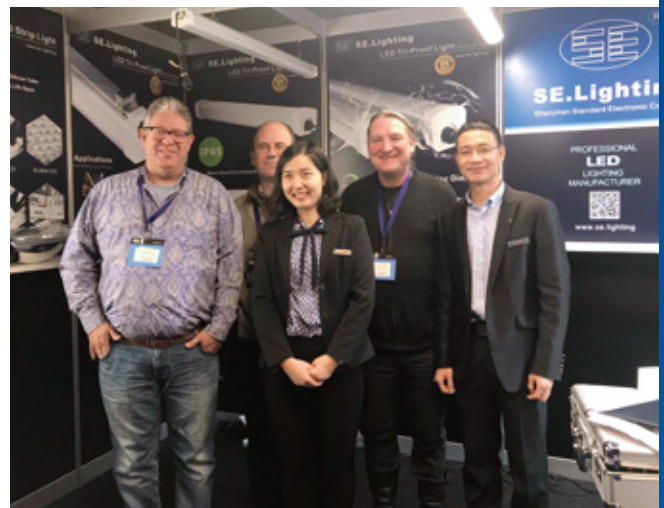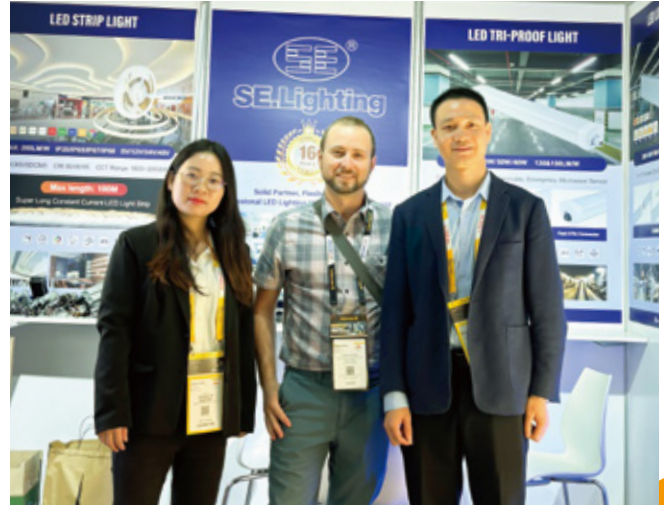



# CONTENTS

---

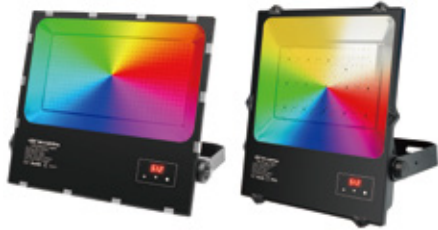

01-07 Page

**LED FLOOD LIGHT**



08-13 Page

**LED WALL WASHER LIGHT**



14-15 Page

**LED TUBE LIGHT**




16-23 Page

**LED NEON LIGHT**



24-28 Page

**COB STRIP LIGHT**



29-49 Page

**LED STRIP LIGHT**



50-55 Page

**LED TRI-PROOF LIGHT**  
**LED LINEAR LIGHT**



56-59 Page

**LED STREET LIGHT**  
**LED HIGH BAY LIGHT**



# RGB RGBW RGB+CCT FLOOD LIGHT

**Can be OEM and ODM for you, Touch panel type options, can Laser your LOGO onto the product.**



1. DMX type: 5 Years Warranty, RF & Wireless type: 3 Years Warranty.
2. RGB+ CCT control mode: DMX Control/DMX Wireless Control/RF Remote Control options.
3. Cable connector, quick lock with securing lever.
4. Adopting integrated Chip as light source with high lighting efficiency, good quality heat dissipation, low light degradation.
5. Aluminium alloy die cast shell, good strength, and high quality heat dissipation. Anti corrosion and baking varnish surface, can be for outdoor using.
6. Make a dedicated luminous intensity distribution design via the aluminum reflector, there are two options for lighting distribution, one is for focusing, another is for divergencing.



# RGBCCT FLOOD LIGHT

DMX Type / RF Type

## BEAM ANGLE

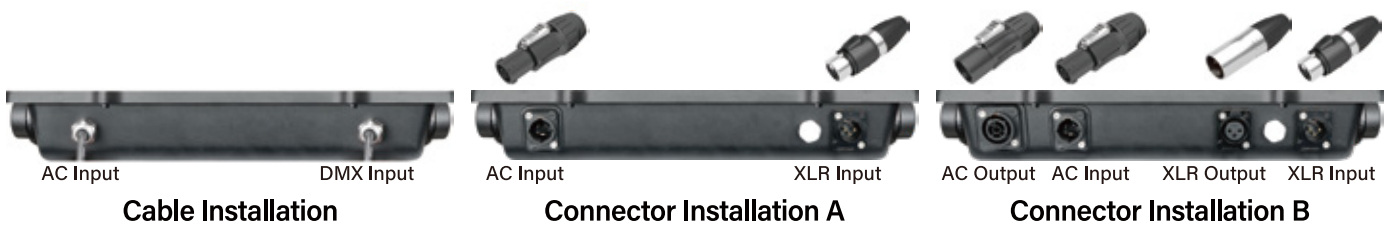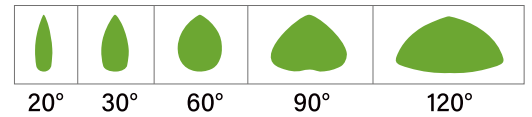




Model No.	Input Voltage	Power	Color	Size/mm	Light Source
SEF-100RGBCCT	AC 100-277V/DC 24V	100W	RGB CCT	L413*W315*H63	3030RGB+3030White
SEF-150RGBCCT	AC 100-277V/DC 24V	150W	RGB CCT	L440*W349*H63	3030RGB+3030White
SEF-200RGBCCT	AC 100-277V/DC 24V	200W	RGB CCT	L480*W379*H63	3030RGB+3030White
SEF-300RGBCCT	AC 100-277V/DC 24V	300W	RGB CCT	L565*W457*H65	3030RGB+3030White
SEF-450RGBCCT	AC 100-277V/DC 24V	450W	RGB CCT	L585*W559*H70	3030RGB+3030White



# RGBW FLOOD LIGHT

DMX Type / RF Type

## BEAM ANGLE


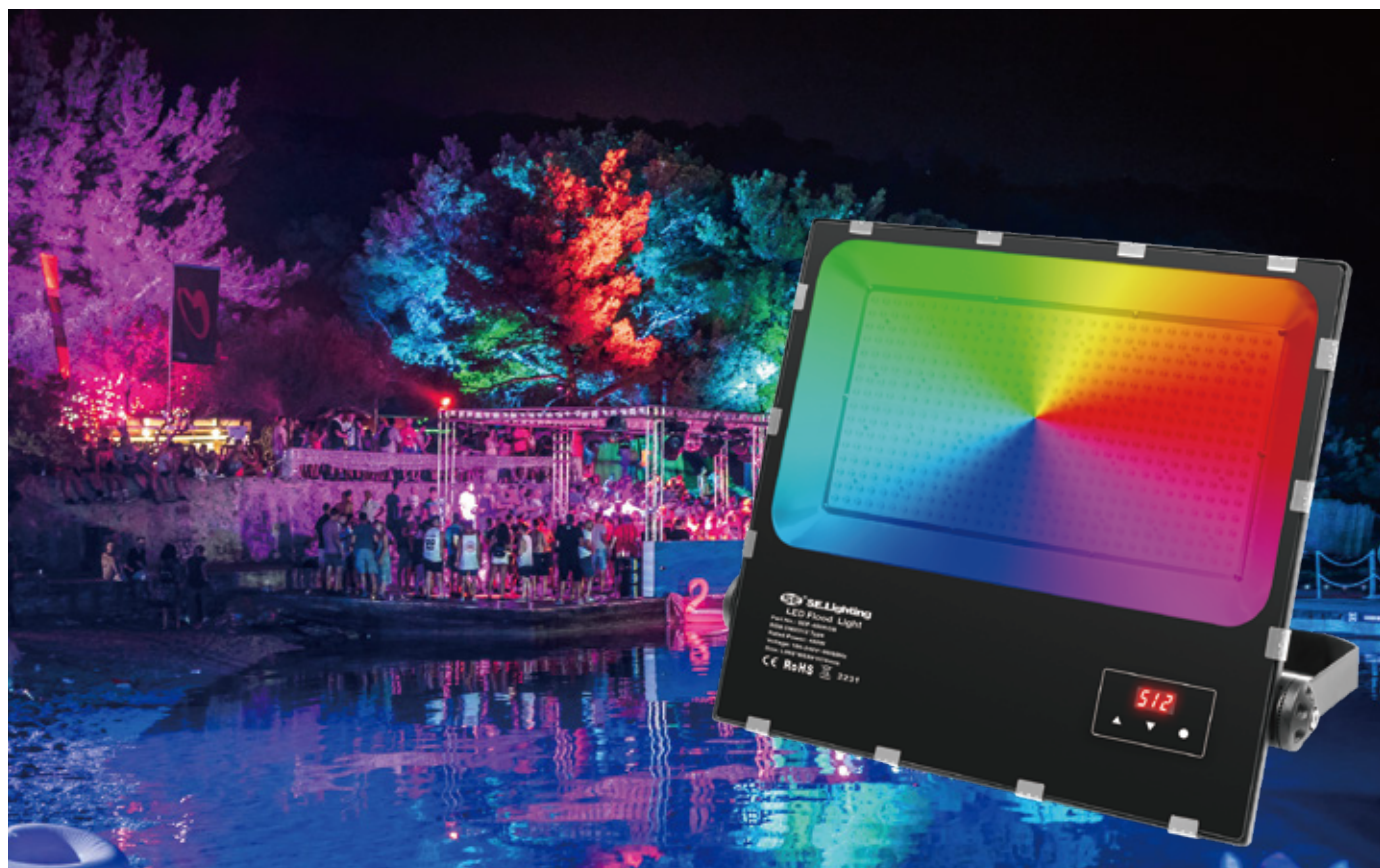
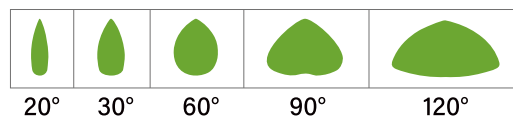


Model No.	Input Voltage	Power	Color	Size/mm	Light Source
SEF-100RGBW	AC 100-277V/DC 24V	100W	RGBW	L413*W315*H63	3030RGB+3030White
SEF-150RGBW	AC 100-277V/DC 24V	150W	RGBW	L440*W349*H63	3030RGB+3030White
SEF-200RGBW	AC 100-277V/DC 24V	200W	RGBW	L480*W379*H63	3030RGB+3030White
SEF-300RGBW	AC 100-277V/DC 24V	300W	RGBW	L565*W457*H65	3030RGB+3030White
SEF-450RGBW	AC 100-277V/DC 24V	450W	RGBW	L585*W559*H70	3030RGB+3030White

# RGB FLOOD LIGHT

DMX Type / RF Type

## BEAM ANGLE

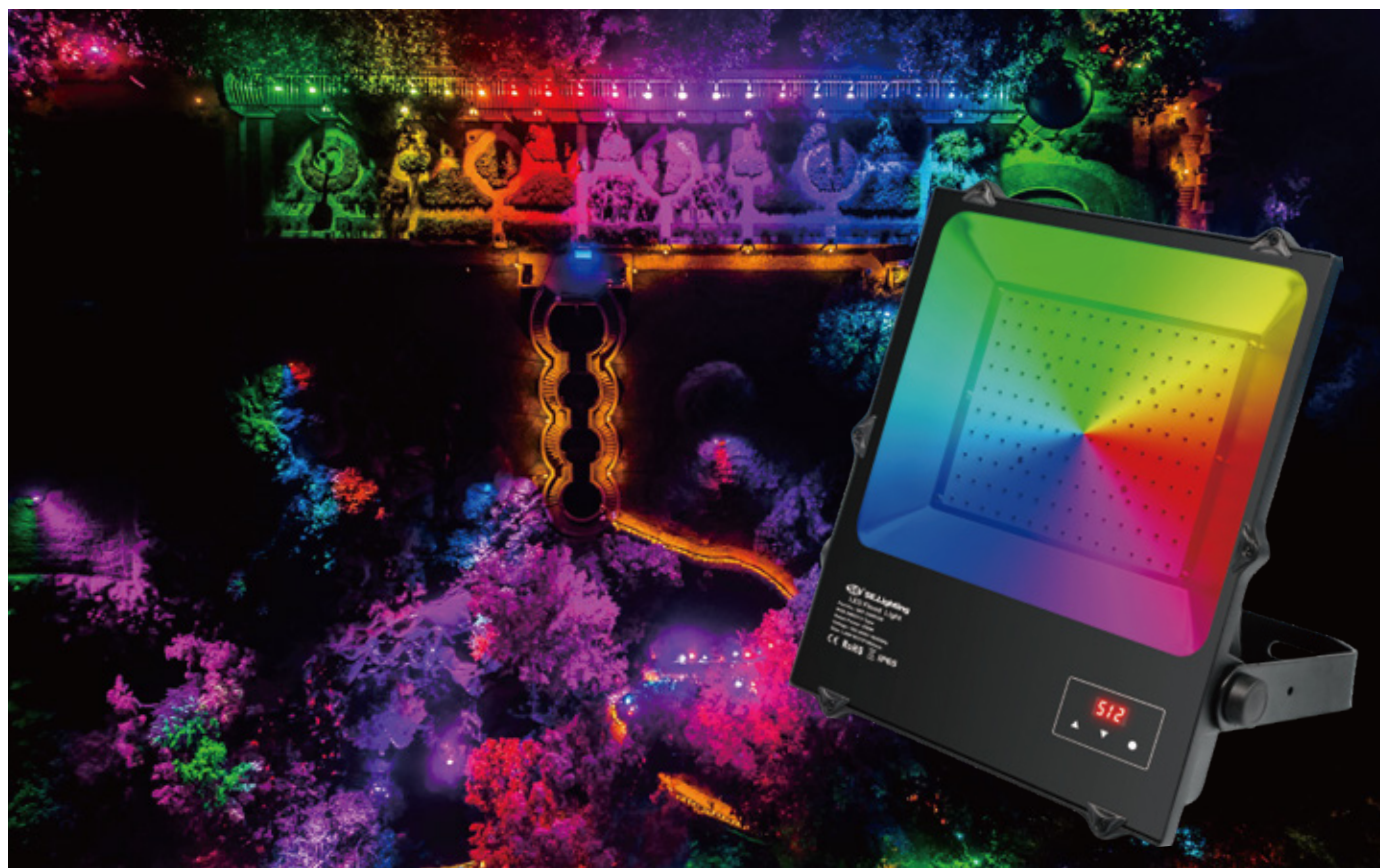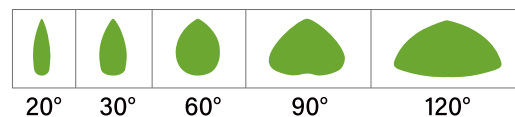



Model No.	Input Voltage	Power	Color	Size/mm	Light Source
SEF-100RGB	AC 100-277V/DC 24V	100W	RGB	L413*W315*H63	3030RGB
SEF-150RGB	AC 100-277V/DC 24V	150W	RGB	L440*W349*H63	3030RGB
SEF-200RGB	AC 100-277V/DC 24V	200W	RGB	L480*W379*H63	3030RGB
SEF-300RGB	AC 100-277V/DC 24V	300W	RGB	L565*W457*H65	3030RGB
SEF-450RGB	AC 100-277V/DC 24V	450W	RGB	L585*W559*H70	3030RGB



# CCT FLOOD LIGHT

DMX Type / RF Type


## BEAM ANGLE

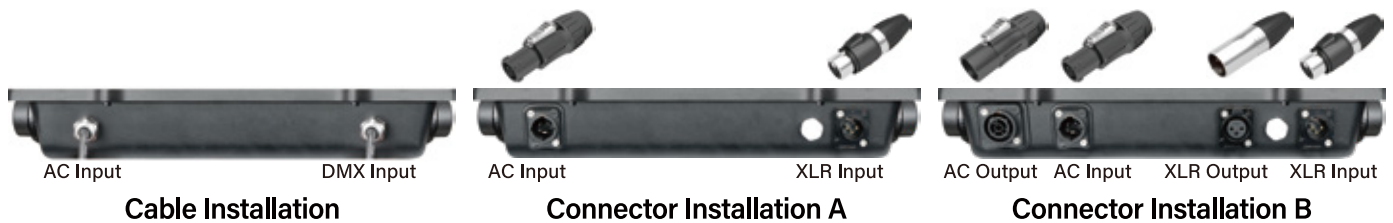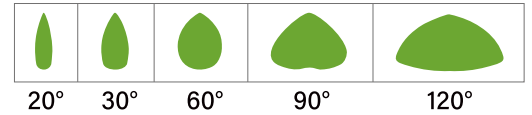

Model No.	Input Voltage	Power	CCT	Size/mm	Light Source
SEF-100CCT	AC 100-277V/DC 24V	100W	3000K+6500K	L413*W315*H63	3030White
SEF-150CCT	AC 100-277V/DC 24V	150W	3000K+6500K	L440*W349*H63	3030White
SEF-200CCT	AC 100-277V/DC 24V	200W	3000K+6500K	L480*W379*H63	3030White
SEF-300CCT	AC 100-277V/DC 24V	300W	3000K+6500K	L565*W457*H65	3030White
SEF-450CCT	AC 100-277V/DC 24V	450W	3000K+6500K	L585*W559*H70	3030White




### DMX Type Connection:

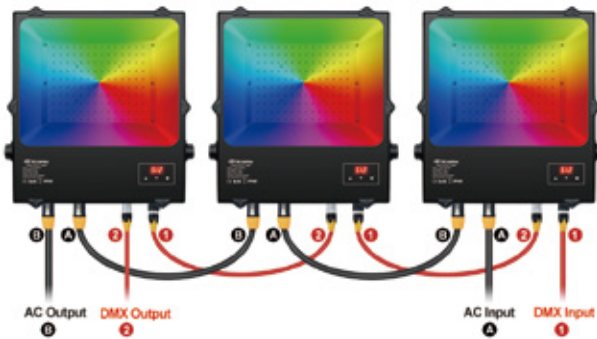


### DMX Wireless Connection:




### RF Type Connection:

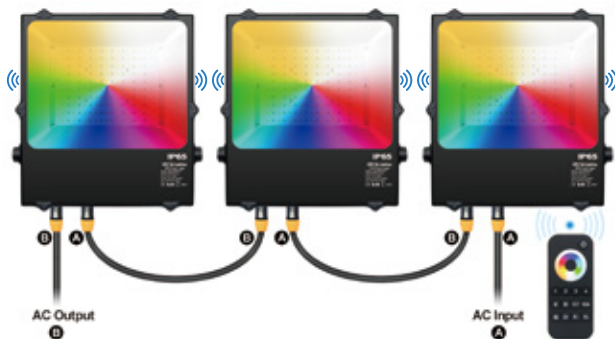


### DMX Wireless In Group:

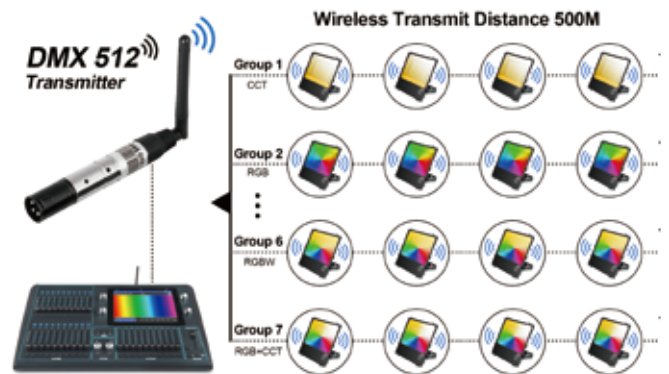






## Signal Transmitting and Mode Synchronization

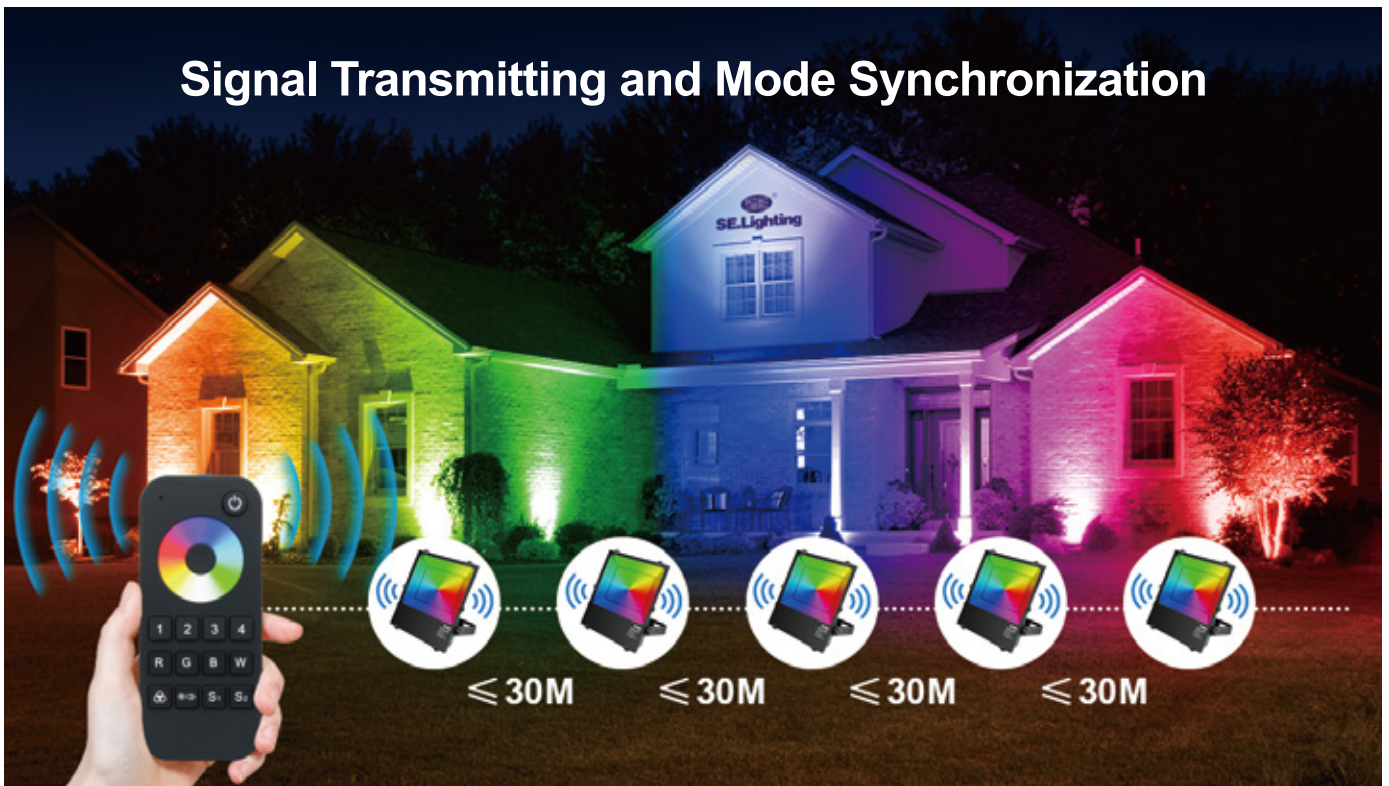


# WHITE FLOOD LIGHT

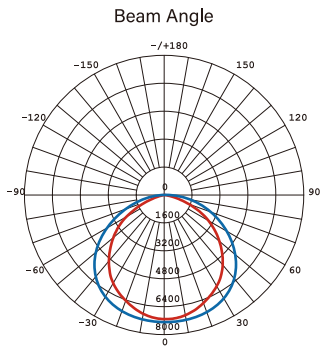

TUV/Meanwell Driver  
Lumileds LED

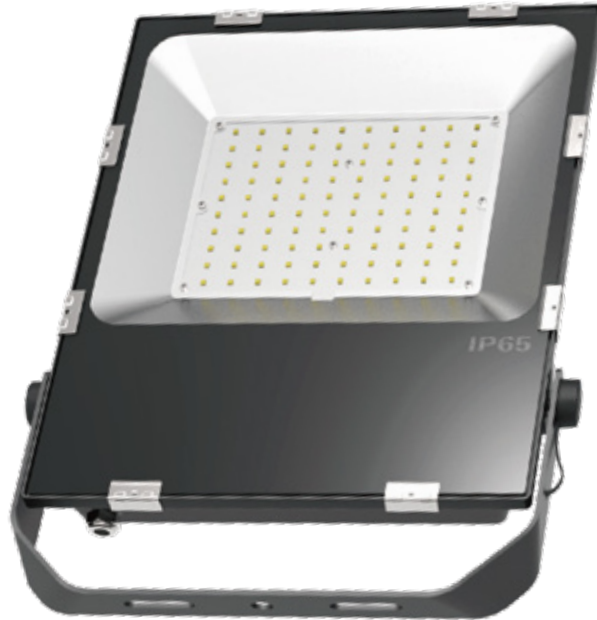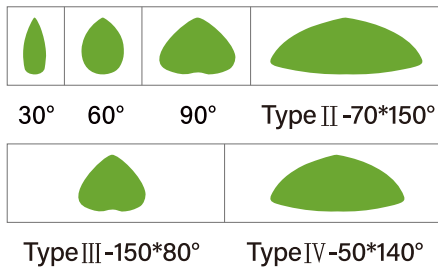

Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SEF-50W	AC100-270V	50W	RA>80	L310*W220*H60mm	120LM/W	6000LM
SEF-80W	AC100-270V	80W	RA>80	L354*W245*H60mm	120LM/W	9600LM
SEF-100W	AC100-270V	100W	RA>80	L402*W295*H60mm	120LM/W	12000LM
SEF-150W	AC100-270V	150W	RA>80	L430*W330*H60mm	120LM/W	18000LM
SEF-200W	AC100-270V	200W	RA>80	L470*W360*H60mm	120LM/W	24000LM
SEF-300W	AC100-270V	300W	RA>80	L565*W457*H65mm	120LM/W	36000LM
SEF-400W	AC100-270V	400W	RA>80	L585*W559*H70mm	120LM/W	48000LM
SEF-450W	AC100-270V	450W	RA>80	L585*W559*H70mm	120LM/W	54000LM







# LED WALL WASHER LIGHT

**Can be OEM and ODM for you, can Laser your LOGO onto the product.**

1. This fixture is a wall washer-led high power light-emitting element, a new generation of green lighting products. Long-distance and wide-angle colorful visual effects bring a new visual experience. Each light can be individually controlled, letting people immerse in the ever-changing color world. Long light source life, fast cooling, high brightness, low consumption, low heat dissipation, long service life.
2. High-quality aluminum: not easy to rust, not easy to corrode, good heat dissipation.
3. It is widely used indoors and outdoors, such as gardens, balconies, terraces, bridges, billboards, commercial lighting, birthday parties, stages, projection lighting, event lighting, sculpture and statue lighting, museum and art gallery lighting, landscape lighting, and other occasions.
4. Operating Mode: DMX512, Master-Slave, Stand Alone , Voice-Control, Auto Run.



# RGBWA WALL WASHER LIGHT (B TYPE)



Part No.: SEW-150RGBWA

Input Voltage: AC100-240V, Internal Driver

Power Consumption: 150W

Light Source Type: 18\*10W RGBWA (5 IN 1)

LED Colour: RGBWA (Red, Green, Blue, White, Amber)

Length: 1MT/3.3FT

Size: 1008\*100\*110mm

Setting & Addressing: 4 Segment LED Display & 4 Control buttons

Manual control of all effects via Control Buttons

Control: Protocols: DMX512, Built-In Program

DMX Channels: 2CH, 5CH, 7CH, 9CH, 90CH, 92CH

Operating Mode: DMX512, Master-Slave, Stand Alone, Voice-Control, Auto Run

Beam Angle: 15° 20° 25° 30° optional

## Single Point Single Control



# RGBW WALL WASHER LIGHT (C TYPE)



Part No.: SEW-100RGBW/SEW-150RGBW  
 Input Voltage: AC100-277V, Internal Driver  
 Power Consumption: 100W/150W  
 Light Source Type: 3535 RGBW (4 IN 1)  
 LED Colour: RGBW (Red, Green, Blue, White)  
 Length: 1MT/3.3FT  
 Size: 1008\*100\*110mm  
 Setting & Addressing: 4 Segment LED Display & 4 Control buttons  
 Manual control of all effects via Control Buttons  
 Control: Protocols: DMX512, Built-In Program  
 DMX Channels: 2CH, 4CH, 6CH, 8CH, 32CH, 34CH  
 Operating Mode: DMX512, Master-Slave, Stand Alone, Auto Run  
 Beam Angle: 10°, 15°, 20°, 35°, 40°, 20x30°, 25x40° optional

## HIGHER POWER MORE LUMEN


Type	Sub Power	Color Mix
100W	50W	1 Color
	100W	2 Color
	100W	3 Color
150W	75W	1 Color
	150W	2 Color
	150W	3 Color

## 8 Segments Different Color Changing





# RGBW WALL WASHER LIGHT (D TYPE)

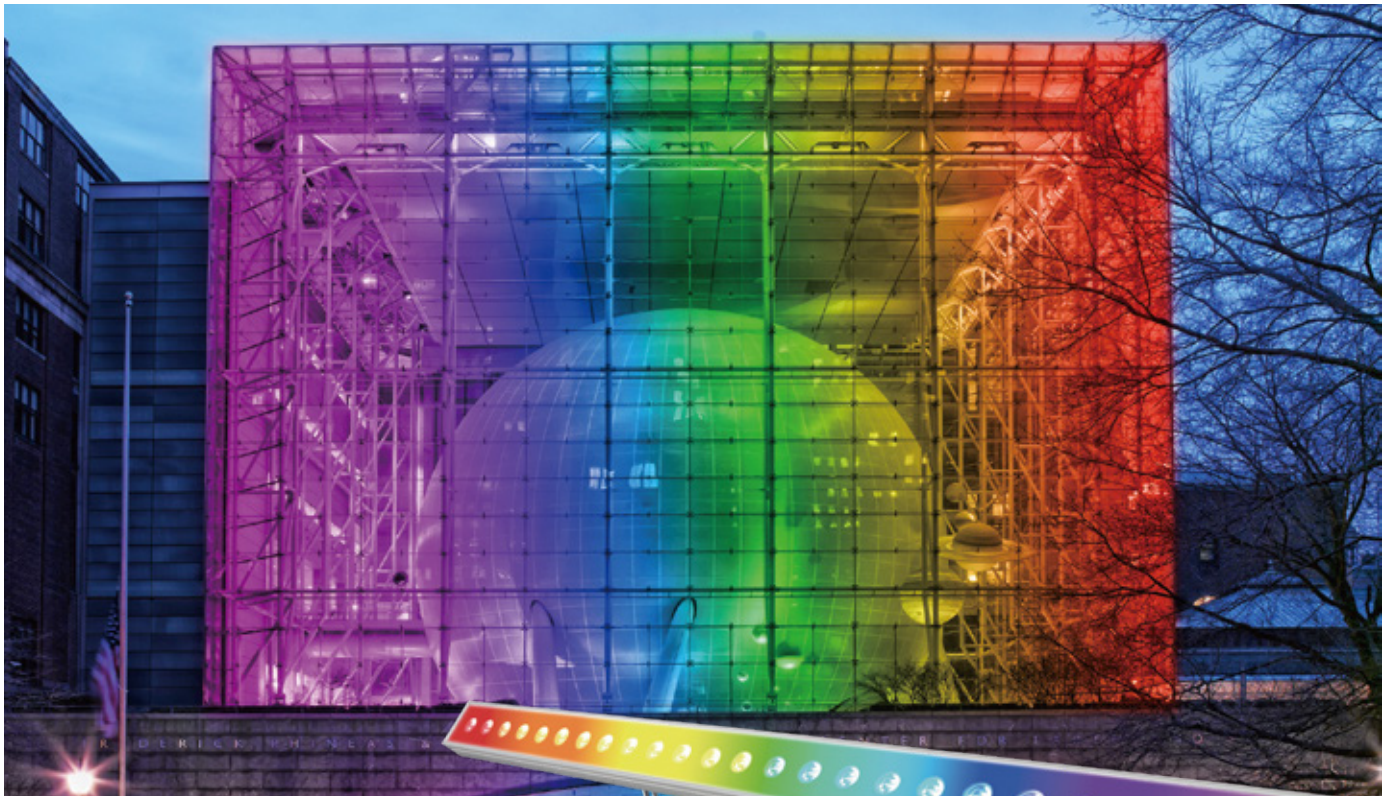

Part No.: SEW-100RGBW

Input Voltage: DC24V, External Driver

Power Consumption: 100W

Light Source Type: 3535 RGBW (4 IN 1)

LED Colour: RGBW (Red, Green, Blue, White)

Length: 1MT/3.3FT

Size: 1000\*60\*35mm

Control: Protocols: DMX512

DMX Channels: 4CH, 16CH

Beam Angle: 10°, 15°, 20°, 35°, 40°, 20x30°, 25x40° optional

## 4 Segments Different Color Changing



# RGBW WALL WASHER LIGHT (E TYPE)



Part No.: SEW-150RGBW

Input Voltage: DC48V, External Driver

Power Consumption: 150W

Light Source Type: 3535 RGBW (4 IN 1)

LED Colour: RGBW (Red, Green, Blue, White)

Length: 1.8MT/6FT

Size: 1800\*92\*70mm

Control: Protocols: DMX512, Built-In Program

DMX Channels: 2CH, 4CH, 6CH, 8CH, 32CH, 34CH

Operating Mode: DMX512, Master-Slave, Stand Alone, Auto Run

Beam Angle: 10°, 15°, 20°, 35°, 40°, 20x30°, 25x40° optional

## 8 Segments Different Color Changing





# RGBW WALL WASHER LIGHT (C TYPE)



Part No.: SEW-300RGBW/SEW-400RGBW

Input Voltage: DC48V, External Driver

Power Consumption: 300W/400W

Light Source Type: 3535 RGBW (4 IN 1)

LED Colour: RGBW (Red, Green, Blue, White)

Length: 1.8MT/6FT, 2.4MT/8FT

Size: 1800\*100\*110mm/2400\*100\*110mm

Control: Protocols: DMX512, Built-In Program

DMX Channels: 2CH, 4CH, 6CH, 8CH, 32CH, 34CH

Operating Mode: DMX512, Master-Slave, Stand Alone, Auto Run

Beam Angle: 10°, 15°, 20°, 35°, 40°, 20x30°, 25x40° optional

## 8 Segments Different Color Changing





# DMX T8 TUBE LIGHT (IP65)


DMX T8 Pixel RGBW Tube light is a LED tube that can be controlled via DMX. The RGBW LEDs inside the tube are same as our LED strips', means that the DMX tube can generate a significant amount of color combinations for your showcase.

It can also be used with any DMX control to achieve colorful and vivid effects. It's also a simple installation of outdoor building solutions, available in different lengths. Tube customization options includes LED color (RGB+White), Grey End Cap+Clear Cover Or White End Cap+Milky Cover.

UV Resistant designed to be with stand outdoor elements, rendering it a reliable solution for both indoor and outdoor environments. It's widely used for Architectural Lighting, Outdoor Lighting and Landscape Lighting, Car wash Lighting, Stage Lighting, DJ Lighting, Party, Wedding, Holiday Events etc.



# DMX T8 TUBE LIGHT (IP65)

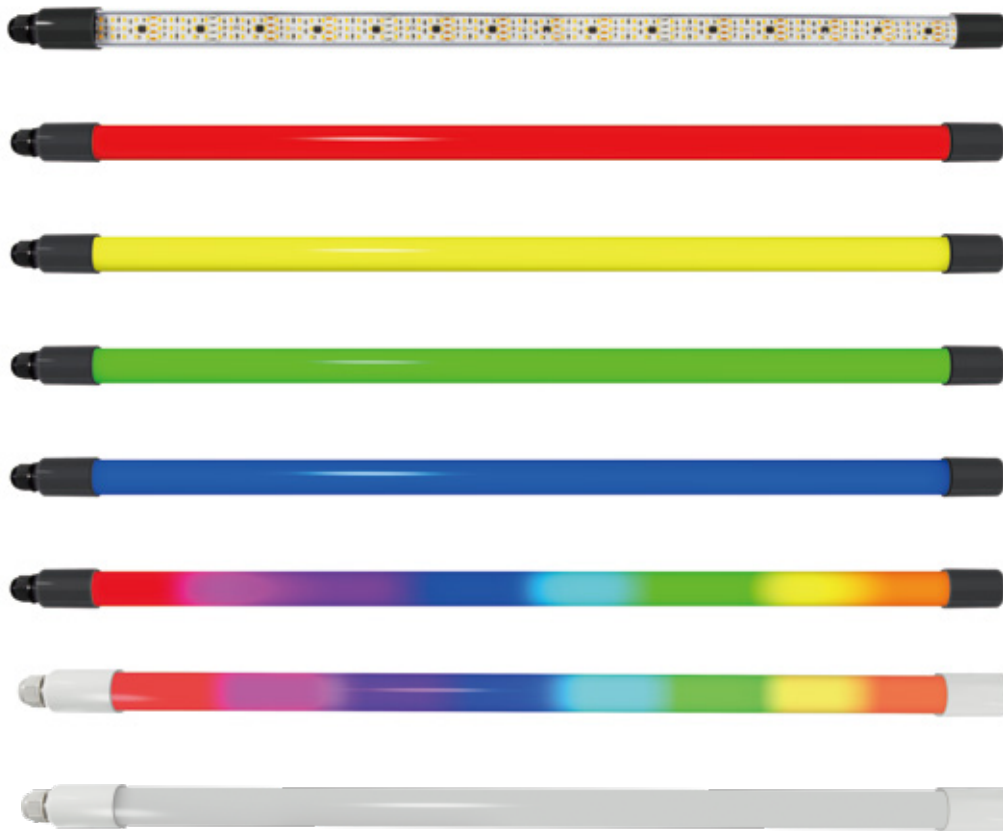

Model No.	Length	Voltage	Power	Color	Pixels	Shape
SE-T8-RGBW-DMX	4FT/6FT/8FT	DC48V	45W/65W/90W	DMX RGBW	13PIX/ 20PIX/ 27PIX	Clear Type
SE-T8-RGBW-DMX	4FT/6FT/8FT	DC48V	35W/55W/70W	DMX RGBW	9PIX/ 14PIX/ 18PIX	MilkyType
SE-T8-W-DMX	4FT/6FT/8FT	DC48V	45W/65W/90W	DMX WHITE	26PIX/ 40PIX/ 54PIX	Clear Type
SE-T8-W-DMX	4FT/6FT/8FT	DC48V	45W/65W/90W	DMX WHITE	26PIX/ 40PIX/ 54PIX	MilkyType
SE-T8-W	4FT/6FT/8FT	DC48V	30W/45W/60W	WHITE	Single Color	Clear/Milky Type
SE-T8-R	4FT/6FT/8FT	DC48V	30W/45W/60W	RED	Single Color	Clear/Milky Type
SE-T8-Y	4FT/6FT/8FT	DC48V	30W/45W/60W	YELLOW	Single Color	Clear/Milky Type
SE-T8-G	4FT/6FT/8FT	DC48V	30W/45W/60W	GREEN	Single Color	Clear/Milky Type
SE-T8-B	4FT/6FT/8FT	DC48V	30W/45W/60W	BLUE	Single Color	Clear/Milky Type



# LED NEON LIGHT


**Can offer OEM and ODM support, with RGB, RGBW, 2700K~6500K, Red, Green, Blue, Yellow option.**

1. Flexible horizontal bending silicone LED neon strip;
2. Dual-color silicone extrusion, 100% Silicone material
3. Use high lumen LEDs for Neon light products, can be cutted every unit type 126pcs 2835 LEDs especially for neon products, can be cut every 7 LEDs (55.6mm)
4. UV resistant and salt mist proof, IP67 waterproof grade, suitable for indoor and outdoor application;
5. 3 years warranty

Widely used for architectural lighting, sign letter lighting, concealed lighting, perimeter lighting




# LED NEON LIGHT 3\*6MM / 6\*6MM

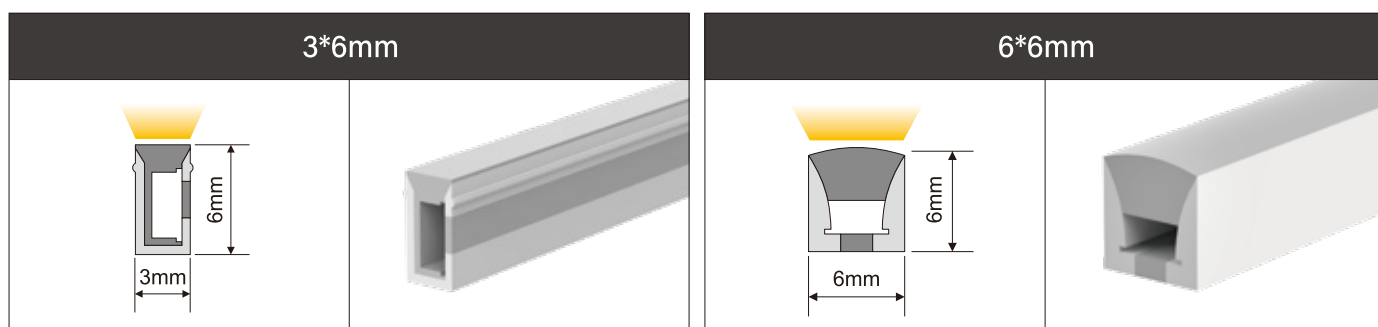

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SEN-0306X-24	DC 24V	RA>90	● 2700K	8.5W	60LM/W	510LM/M
SEN-0306X-24	DC 24V	RA>90	● 3000K	8.5W	65LM/W	552LM/M
SEN-0306X-24	DC 24V	RA>90	● 4000K	8.5W	75LM/W	637LM/M
SEN-0306X-24	DC 24V	RA>90	○ 6500K	8.5W	75LM/W	637LM/M
SEN-0606X-24	DC 24V	RA>90	● 2700K	8.5W	60LM/W	510LM/M
SEN-0606X-24	DC 24V	RA>90	● 3000K	8.5W	65LM/W	552LM/M
SEN-0606X-24	DC 24V	RA>90	● 4000K	8.5W	75LM/W	637LM/M
SEN-0606X-24	DC 24V	RA>90	○ 6500K	8.5W	75LM/W	637LM/M




# LED NEON LIGHT 4\*8MM / 6\*12MM

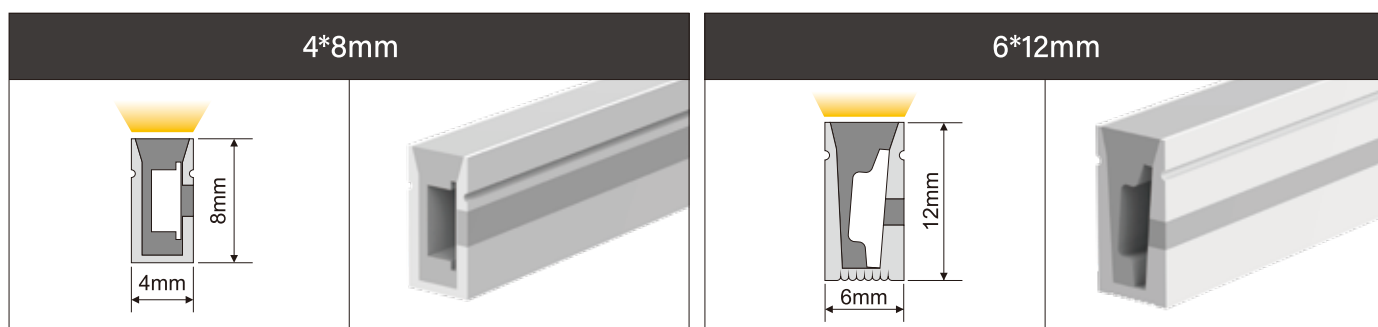


Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SEN-0408X-24	DC 24V	RA>90	● 2700K	8.5W	60LM/W	510LM/M
SEN-0408X-24	DC 24V	RA>90	● 3000K	8.5W	65LM/W	552LM/M
SEN-0408X-24	DC 24V	RA>90	● 4000K	8.5W	75LM/W	637LM/M
SEN-0408X-24	DC 24V	RA>90	○ 6500K	8.5W	75LM/W	637LM/M
SEN-0612X-24	DC 24V	RA>90	● 2700K	8.5W	60LM/W	510LM/M
SEN-0612X-24	DC 24V	RA>90	● 3000K	8.5W	65LM/W	552LM/M
SEN-0612X-24	DC 24V	RA>90	● 4000K	8.5W	75LM/W	637LM/M
SEN-0612X-24	DC 24V	RA>90	○ 6500K	8.5W	75LM/W	637LM/M




# LED NEON LIGHT 16\*16MM

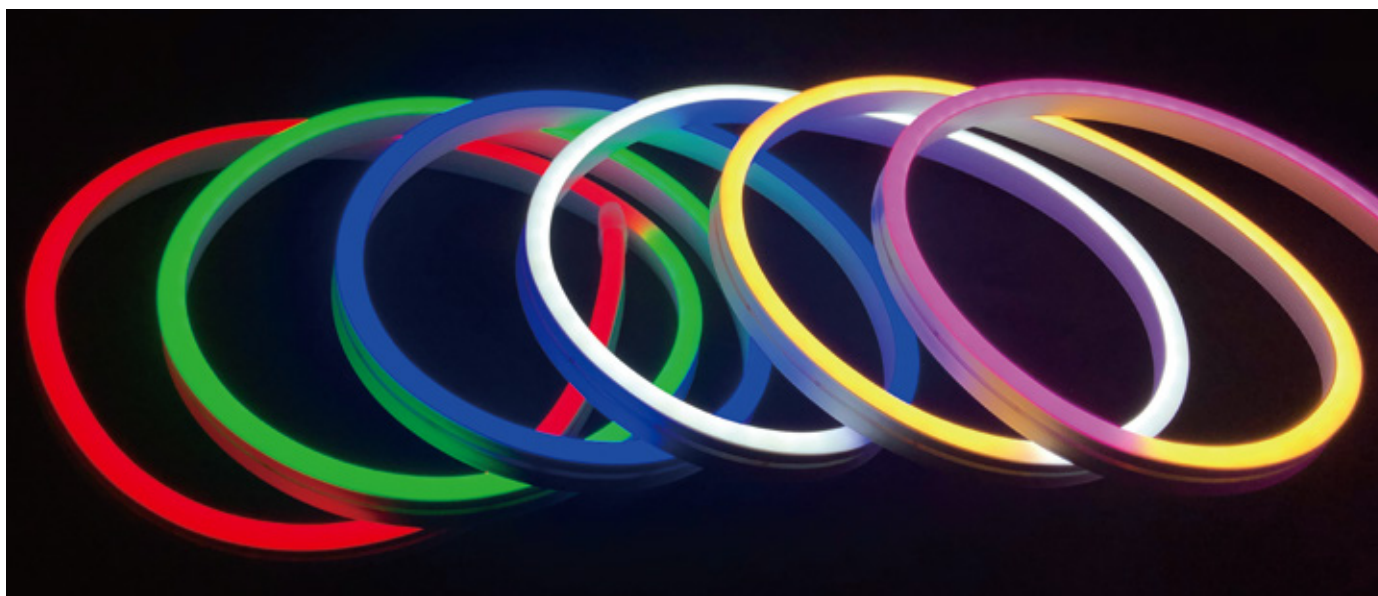


16\*16mm Top View

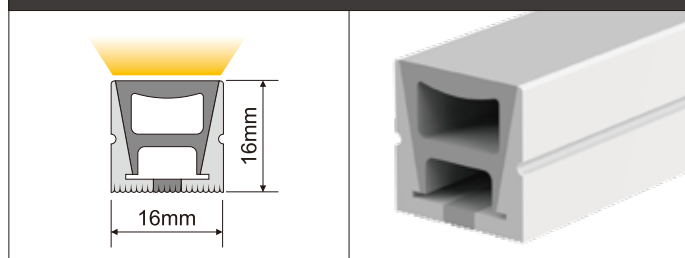



16\*16mm Side View

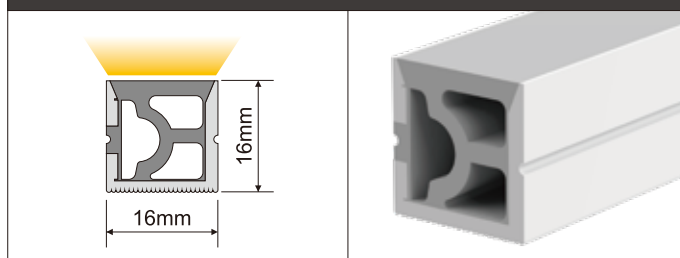


Model No.	Voltage	CRI	Color&CCT	Watt/M	IC TYPE	Lumen ±10%
SEN-1616X-24	DC 24V	RA>80	○ DMX WHITE	11W	/	860LM/M
SEN-1616RGB-24	DC 24V	/	RGB	12W	/	/
SEN-1616WIC-5	DC 5V	RA>80	○ MAGIC WHITE	14W	WS2812	/
SEN-1616RGBIC-5	DC 5V	/	MAGIC RGB	14W	WS2812	/
SEN-1616RGBIC-24	DC 24V	/	MAGIC RGB	14W	WS2811	/
SEN-1616WDMX-24	DC 24V	RA>80	○ DMX WHITE	16W	DMX512	/
SEN-1616RGBWDMX-24	DC 24V	/	○ DMX RGBW	20W	DMX512	/



# LED NEON LIGHT 8\*17MM / 10\*10MM

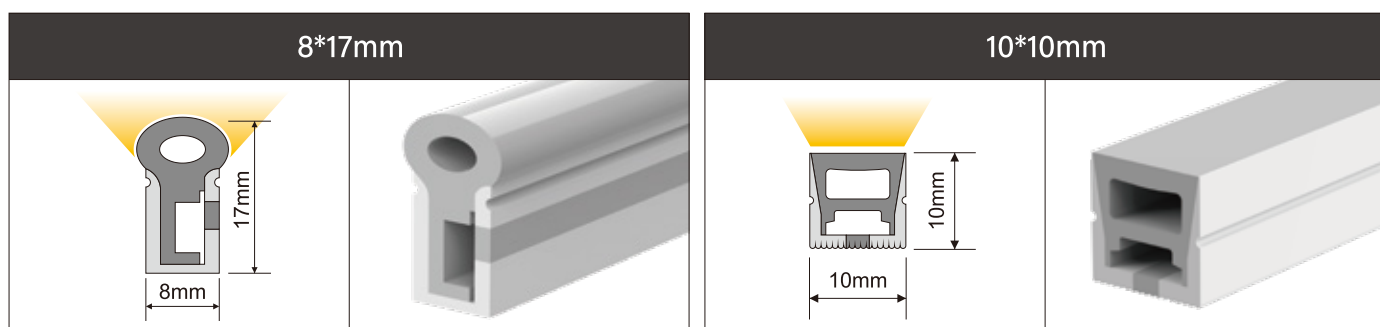

Model No.	Voltage	FPC	CRI	Color&CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SEN-0817X-24	DC 24V	10mm	RA>80	○ DMX WHITE	7W	75LM/W	525LM/M
SEN-1010X-24	DC 24V	10mm	RA>80	○ DMX WHITE	7W	75LM/W	525LM/M

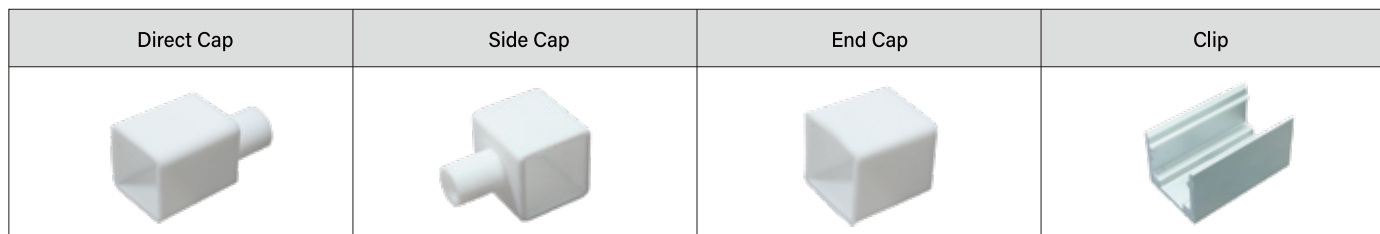





# LED NEON LIGHT 12\*12MM



12\*12mm Top View

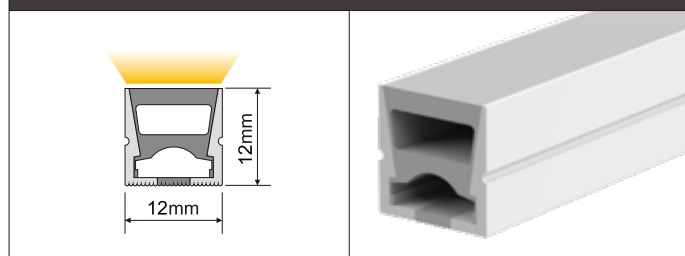

12\*12mm Side View

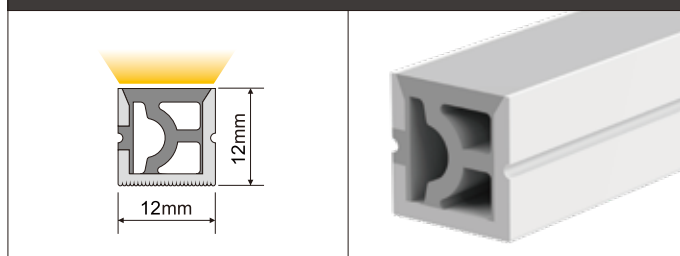



Model No.	Voltage	FPC	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SEN-1212X-24T	DC 24V	10mm	RA>80	○ DMX WHITE	7W	75LM/W	525LM/W
SEN-1212X-24S	DC 24V	10mm	RA>80	○ DMX WHITE	7W	70LM/W	490LM/W

Direct Cap	Side Cap	End Cap	Clip





# LED NEON LIGHT 10\*18MM / 12\*20MM

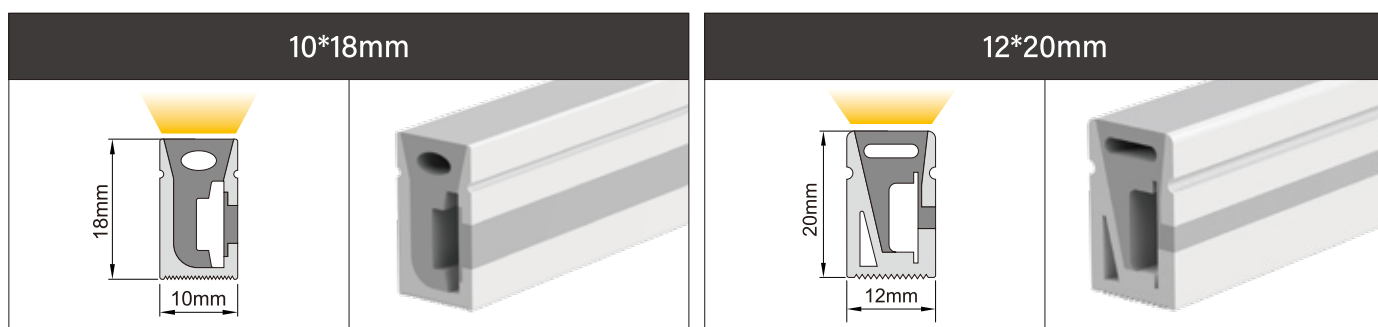

Model No.	Voltage	CRI	Color&CCT	Watt/M	IC TYPE	Lumen ±10%
SEN-1018/1220X-24	DC 24V	RA>80	○ DMX WHITE	11 W	/	860LM/M
SEN-1018/1220RGB-24	DC 24V	/	 RGB	12 W	/	/
SEN-1018/1220WIC-5	DC 5V	RA>80	○ MAGIC WHITE	14 W	WS2812	/
SEN-1018/1220RGBIC-5	DC 5V	/	 MAGIC RGB	14 W	WS2812	/
SEN-1018/1220RGBIC-24	DC 24V	/	 MAGIC RGB	14 W	WS2811	/
SEN-1220WDMX-24	DC 24V	RA>80	○ DMX WHITE	16 W	DMX512	/
SEN-1220RGBWDMX-24	DC 24V	/	 DMX RGBW	20 W	DMX512	/



# LED NEON LIGHT 50\*25MM / 40\*25MM

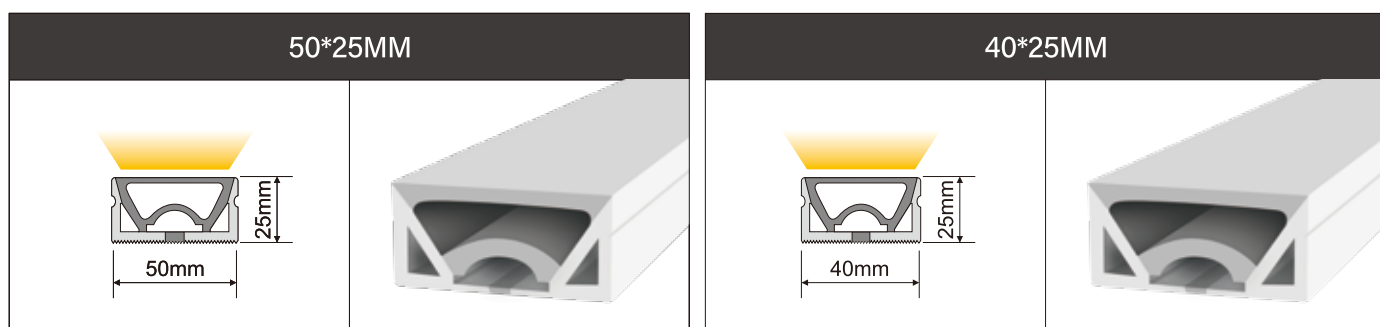

Model No.	Voltage	CRI	Color&CCT	Watt/M	IC TYPE	Default Channel
SEN-5025WDMX-48	DC48V	RA>80	○ DMX WHITE	28W	DMX512	24CH/MT
SEN-5025RGBWDMX-48	DC48V	/	RGBW ○ DMX RGBW	40W	DMX512	48CH/MT
SEN-4025WDMX-48	DC48V	RA>80	○ DMX WHITE	28W	DMX512	24CH/MT
SEN-4025RGBWDMX-48	DC48V	/	RGBW ○ DMX RGBW	40W	DMX512	48CH/MT





# LED STRIP LIGHT COB TYPE

- 1.CCT: 2700K/3000K/4000K/5000K/6500K
- 2.Color: Red/Green/Blue/Yellow/RGB/RGBW/RGBCCCT
- 3.IP Rate: IP20/IP65/IP67/IP68
- 4.CRI: RA80/90/95
- 5.Voltage: DC5V/12V/24V
- 6.Control: Dimmable/SPI (Pixel)/DMX512
- 7.Package: 5mt or 10mt per Roll
- 8.Long lifespan: 50,000 hours
- 9.Certification: CE/ROHS/UKCA/EN62471/ERP
- 10.OEM and ODM Available



IP20



IP65



IP67



IP68



# COB 320&400&480LED/M

## COB SERIES (5MT FPC)



	SELS-COBX320-12/24-YR	SELS-COBX480-12/24-YR	SELS-COBX400-12/24-YR					
12V								
24V								

Model No.	FPC	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SELS-COBWW320-12/24-YR	8mm	DC 12/24V	Ra>90	● 3000K	8W	70lm/W	560lm/m
SELS-COBNW320-12/24-YR	8mm	DC 12/24V	Ra>90	● 4000K	8W	80lm/W	640lm/m
SELS-COBPW320-12/24-YR	8mm	DC 12/24V	Ra>90	○ 6000K	8W	80m/W	640lm/m
SELS-COBWW480-12/24-YR	8mm	DC 12/24V	Ra>90	● 3000K	11W	80lm/w	880lm/m
SELS-COBNW480-12/24-YR	8mm	DC 12/24V	Ra>90	● 4000K	11W	90lm/w	990lm/m
SELS-COBPW480-12/24-YR	8mm	DC 12/24V	Ra>90	○ 6000K	11W	90lm/w	990lm/m
SELS-COBWW400-12/24-YR	5mm	DC 12/24V	Ra>90	● 3000K	10W	70lm/w	700lm/m
SELS-COBNW400-12/24-YR	5mm	DC 12/24V	Ra>90	● 4000K	10W	80lm/w	800lm/m
SELS-COBPW400-12/24-YR	5mm	DC 12/24V	Ra>90	○ 6000K	10W	80lm/w	800lm/m




# COB 480LED/M




## COB SERIES



SELS-COBX480-12/24-YB



SELS-COBX480-12/24-YC



Model No.	FPC	Voltage	CRI	Color&CCT	Watt/M	Efficiency ±10%	Lumen ±10%
SELS-COBWW480-12/24-YC	8mm	DC 12/24V	Ra>90	● 2700K	11W	90lm/w	990lm/m
SELS-COBWW480-12/24-YC	8mm	DC 12/24V	Ra>90	● 3000K	11W	95lm/w	1045lm/m
SELS-COBNW480-12/24-YC	8mm	DC 12/24V	Ra>90	● 4000K	11W	100lm/w	1100lm/m
SELS-COBPW480-12/24-YC	8mm	DC 12/24V	Ra>90	○ 6000K	11W	105lm/w	1155lm/m
SELS-COBR480-12/24-YB	8mm	DC 12/24V	/	● Red	11W	/	/
SELS-COBG480-12/24-YB	8mm	DC 12/24V	/	● Green	11W	/	/
SELS-COBB480-12/24-YB	8mm	DC 12/24V	/	● Blue	11W	/	/
SELS-COBY480-12/24-YB	8mm	DC 12/24V	/	● Yellow	11W	/	/
SELS-COBO480-12/24-YB	8mm	DC 12/24V	/	● Orange	11W	/	/
SELS-COBPP480-12/24-YB	8mm	DC 12/24V	/	● Plastic Pink	11W	/	/
SELS-COBMG480-12/24-YB	8mm	DC 12/24V	/	● Mars Green	11W	/	/
SELS-COBTB480-12/24-YB	8mm	DC 12/24V	/	● Tiffany Blue	11W	/	/




# COB RGB RGBW RGBCCT


## COB SERIES




SELS-COBRGB576-24-Y

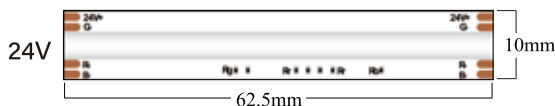


SELS-COBRGB768-24-Y

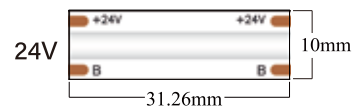

SELS-COBRGBW784-24-Y

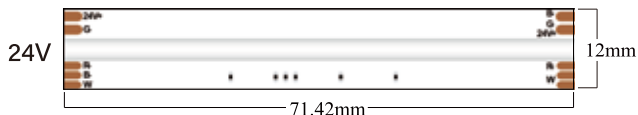

SELS-COBRGBCCT840-24-Y

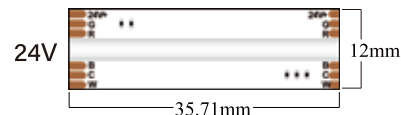

Model No.	Voltage	Watt/M	FPC	Unit Length	Color	LED Type
SELS-COBRGB576-24-Y	DC 24V	14W	10mm	62.50mm	RGB	576PCS
SELS-COBRGB768-24-Y	DC 24V	14W	10mm	31.26mm	RGB	768PCS
SELS-COBRGB1080-24-Y	DC 24V	14W	12mm	50.00mm	RGB	1080PCS
SELS-COBRGBW784-24-Y	DC 24V	19W	12mm	71.42mm	RGBW	784PCS
SELS-COBRGBCCT840-24-Y	DC24V	21W	12mm	35.71mm	RGBCCT	840PCS





# COB WHITE/RGB/RGBW



## MAGIC (PIXEL) SERIES




SELS-COBRGB720-12/24-YIC

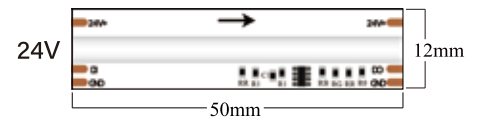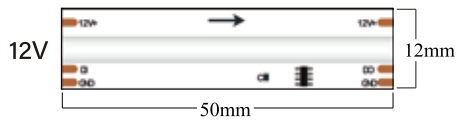


SELS-COBRGB576-12/24-YIC

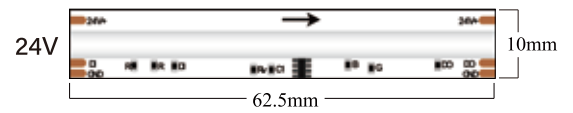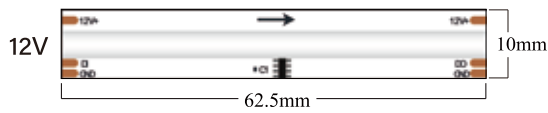

SELS-COBX360-24-YIC

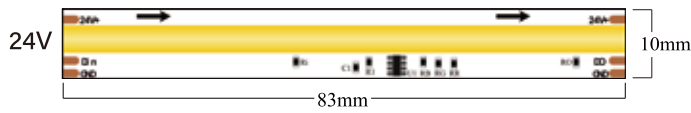

SELS-COBRGBW784-24-YIC

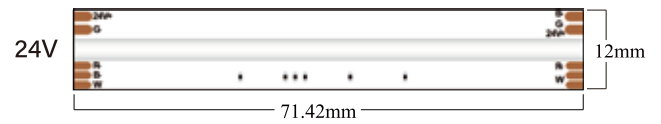

Model No.	Voltage	Watt/M	FPC	Unit Length	Color	LED Type
SELS-COBX360-24-YIC	DC 24V	11W	10mm	83.00mm	○ MAGIC WHITE	360PCS
SELS-COBRGB576-12/24-YIC	DC 12/24V	8/16W	10mm	62.50mm	● MAGIC RGB	576PCS
SELS-COBRGB720-12/24-YIC	DC 12/24V	10/18W	12mm	50.00mm	● MAGIC RGB	720PCS
SELS-COBRGBW784-24-YIC	DC 24V	21W	12mm	71.42mm	● MAGIC RGBW	784PCS



# LED STRIP LIGHT LED TYPE

- 1.CCT: 2700K/3000K/4000K/5000K/6500K
- 2.Color: Red/Green/Blue/Yellow/RGB/RGBW/RGBCCT
- 3.IP Rate: IP20/IP65/IP67/IP68
- 4.CRI: RA80/90/95
- 5.Voltage: DC5V/12V/24V/48V
- 6.Control: Dimmable/SPI (Pixel)/DMX512
- 7.Package: 5mt or 10mt per Roll, Max 100mt per Roll
- 8.Long lifespan: 50,000 hours
- 9.Certification: CE/ROHS/UKCA/EN62471/ERP
- 10.OEM and ODM Available



IP20



IP65



IP67




IP68

# WHITE/RGBW 84LED/M

## 24V DMX512 SERIES





SELS-5050W84-24-YDMX




Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	CCT
SELS-5050W84-24-YDMX	DC 24V	16W	DMX512	12mm	3 Oz Double layer	○ DMX WHITE



SELS-5050RGBW84-24-YDMX

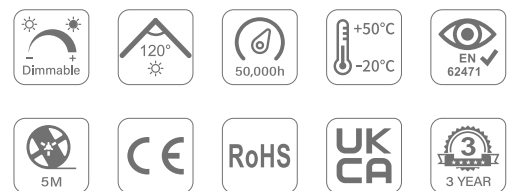

Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	Color
SELS-5050RGBW84-24-YDMX	DC 24V	20W	DMX512	12mm	3 Oz Double layer	 ○ DMX RGBW




# WHITE/RGBW 360&168LED/M

## 48V DMX512 SERIES





SELS-2835W360-48-YDMX

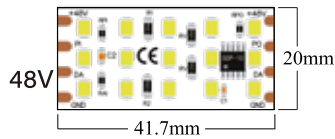

Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	CCT
SELS-2835W360-48-YDMX	DC48V	28W	DMX512	20mm	2 Oz Double layer	○ DMX WHITE



SELS-5050RGBW168-48-YDMX

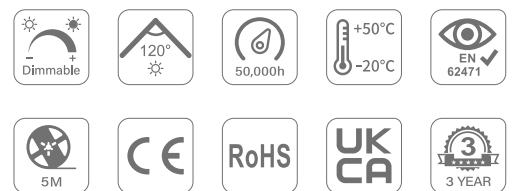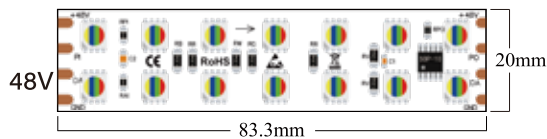

Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	Color
SELS-5050RGBW168-48-YDMX	DC48V	40W	DMX512	20mm	2 Oz Double layer	○ DMX RGBW

# WHITE/RGBW 60LED/M


## MAGIC (PIXEL) SERIES



SELS-5050W60-5-YIC



SELS-5050W60-12-YIC




60pcs 5050White(Build-in), 1pcs LED/Unit




Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	CCT
SELS-5050W60-5-YIC	DC5V	14W	WS2812	10mm	2.5 Oz Double layer	○ MAGIC WHITE
SELS-5050W60-12-YIC	DC12V	20W	WS2815	10mm	2.5 Oz Double layer	○ MAGIC WHITE




SELS-5050RGBX60-5-YIC



SELS-5050RGBX60-24-YIC



60pcs 5050RGBW(Build-in), 1pcs/6pcs LED/Unit

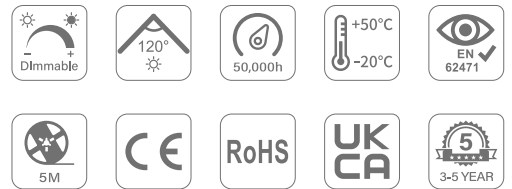

Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	Color
SELS-5050RGBX60-5-YIC	DC5V	14W	WS1877	10mm	2.5 Oz Double layer	RGBW ○ MAGIC RGBW
SELS-5050RGBX60-24-YIC	DC24V	16W	WS2814	10mm	2.5 Oz Double layer	RGBW ○ MAGIC RGBW

# RGB 60&84LED/M




## MAGIC (PIXEL) SERIES




SELS-5050RGB60-5-YIC

SELS-5050RGB84-5-YIC

SELS-5050RGB60-12-YIC




60pcs/84pcs 5050RGB(Build-in), 1pcs LED/Unit

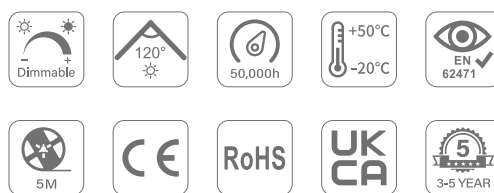


Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	Color
SELS-5050RGB60-5-YIC	DC5V	14W	WS2812	10mm	2.5 Oz Double layer	MAGIC RGB
SELS-5050RGB84-5-YIC	DC5V	14W	WS2812	10mm	2.5 Oz Double layer	MAGIC RGB
SELS-5050RGB60-12-YIC	DC12V	20W	WS2815	10mm	2.5 Oz Double layer	MAGIC RGB



SELS-5050RGB60-24-YIC



60pcs 5050RGB+10pcs IC/M, 1pcs/6pcs LED/Unit

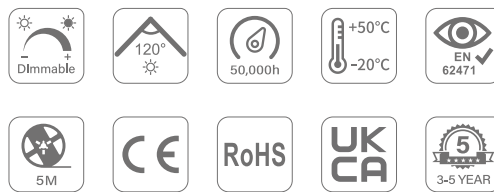


Model No.	Voltage	Watt/M	IC Type	FPC	FPC Thickness	Color
SELS-5050RGB60-24-YIC	DC 24V	14W	WS2811	10mm	2.5 Oz Double layer	MAGIC RGB



# 2835 126LED/M

MAX 200LM/W

★ High Lumen ★

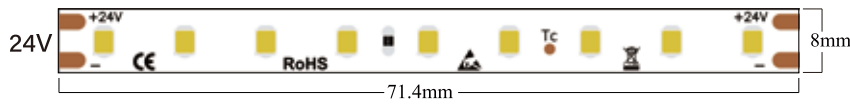


Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW126-24-YD	DC 24V	RA>80	● 2700K	8W	190LM/W	1520LM/M	C
SELS-2835WW126-24-YD	DC 24V	RA>80	● 3000K	8W	190LM/W	1520LM/M	C
SELS-2835NW126-24-YD	DC 24V	RA>80	○ 4000K	8W	200LM/W	1600LM/M	B
SELS-2835PW126-24-YD	DC 24V	RA>80	○ 6500K	8W	200LM/W	1600LM/M	B
SELS-2835WW126-24-YD	DC 24V	RA>90	● 2700K	8W	150LM/W	1200LM/M	D
SELS-2835WW126-24-YD	DC 24V	RA>90	● 3000K	8W	150LM/W	1200LM/M	D
SELS-2835NW126-24-YD	DC 24V	RA>90	○ 4000K	8W	160LM/W	1280LM/M	D
SELS-2835PW126-24-YD	DC 24V	RA>90	○ 6500K	8W	160LM/W	1280LM/M	D



# 2835 64LED/M

MAX 160LM/W

★ High Lumen ★

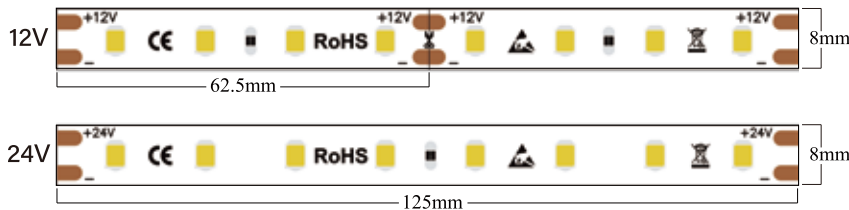

- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW64-12/24-Y	DC 12/24V	RA>80	● 2700K	6W	150LM/W	900LM/M	D
SELS-2835WW64-12/24-Y	DC 12/24V	RA>80	● 3000K	6W	155LM/W	930LM/M	D
SELS-2835NW64-12/24-Y	DC 12/24V	RA>80	○ 4000K	6W	160LM/W	960LM/M	D
SELS-2835PW64-12/24-Y	DC 12/24V	RA>80	○ 6500K	6W	160LM/W	960LM/M	D
SELS-2835WW64-12/24-Y	DC 12/24V	RA>90	● 2700K	6W	120LM/W	720LM/M	E
SELS-2835WW64-12/24-Y	DC 12/24V	RA>90	● 3000K	6W	120LM/W	720LM/M	E
SELS-2835NW64-12/24-Y	DC 12/24V	RA>90	○ 4000K	6W	135LM/W	810LM/M	E
SELS-2835PW64-12/24-Y	DC 12/24V	RA>90	○ 6500K	6W	130LM/W	780LM/M	E


- 
- 
- 
- 
- 
- 
- 
- 
- 

SDCM3 / SDCM 5, CRI 80/90/95, CCT Range: 1600~30000K Available to Customize

# 2835 128LED/M

MAX 160LM/W

★ High Lumen ★

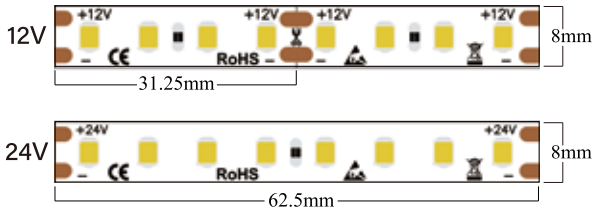

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW128-12/24-YA	DC 12/24V	RA>80	● 2700K	10W	155LM/W	1550LM/M	D
SELS-2835WW128-12/24-YA	DC 12/24V	RA>80	● 3000K	10W	155LM/W	1550LM/M	D
SELS-2835NW128-12/24-YA	DC 12/24V	RA>80	○ 4000K	10W	160LM/W	1600LM/M	D
SELS-2835PW128-12/24-YA	DC 12/24V	RA>80	○ 6500K	10W	160LM/W	1600LM/M	D
SELS-2835WW128-12/24-YA	DC 12/24V	RA>90	● 2700K	10W	120LM/W	1200LM/M	E
SELS-2835WW128-12/24-YA	DC 12/24V	RA>90	● 3000K	10W	120LM/W	1200LM/M	E
SELS-2835NW128-12/24-YA	DC 12/24V	RA>90	○ 4000K	10W	135LM/W	1350LM/M	E
SELS-2835PW128-12/24-YA	DC 12/24V	RA>90	○ 6500K	10W	130LM/W	1300LM/M	E






# 2835 144LED/M

MAX 175LM/W

★ High Lumen ★

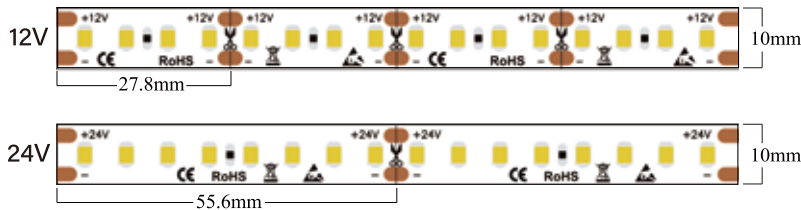

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW144-24-5YC	DC 24V	RA>80	● 2700K	12W	160LM/W	1920LM/M	D
SELS-2835WW144-24-5YC	DC 24V	RA>80	● 3000K	12W	165LM/W	1980LM/M	D
SELS-2835NW144-24-5YC	DC 24V	RA>80	● 4000K	12W	175LM/W	2100LM/M	C
SELS-2835PW144-24-5YC	DC 24V	RA>80	○ 6500K	12W	170LM/W	2040LM/M	D
SELS-2835WW144-12/24-5Y	DC 12/24V	RA>80	● 2700K	12W	145LM/W	1740LM/M	E
SELS-2835WW144-12/24-5Y	DC 12/24V	RA>80	● 3000K	12W	150LM/W	1800LM/M	D
SELS-2835NW144-12/24-5Y	DC 12/24V	RA>80	● 4000K	12W	160LM/W	1920LM/M	D
SELS-2835PW144-12/24-5Y	DC 12/24V	RA>80	○ 6500K	12W	160LM/W	1920LM/M	D




SDCM3 / SDCM 5, CRI 80/90/95, CCT Range: 1600~30000K Available to Customize

# 2835 192LED/M

MAX 175LM/W

★ High Lumen ★

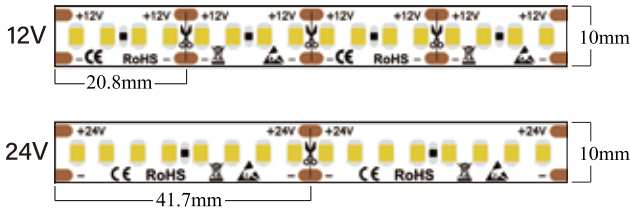



Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW192-24-5YC	DC 24V	RA>80	● 2700K	16W	160LM/W	2560LM/M	D
SELS-2835WW192-24-5YC	DC 24V	RA>80	● 3000K	16W	165LM/W	2640LM/M	D
SELS-2835NW192-24-5YC	DC 24V	RA>80	● 4000K	16W	175LM/W	2800LM/M	C
SELS-2835PW192-24-5YC	DC 24V	RA>80	○ 6500K	16W	170LM/W	2700LM/M	D
SELS-2835WW192-12/24-5Y	DC 12/24V	RA>80	● 2700K	16W	145LM/W	2320LM/M	E
SELS-2835WW192-12/24-5Y	DC 12/24V	RA>80	● 3000K	16W	150LM/W	2400LM/M	D
SELS-2835NW192-12/24-5Y	DC 12/24V	RA>80	● 4000K	16W	160LM/W	2560LM/M	D
SELS-2835PW192-12/24-5Y	DC 12/24V	RA>80	○ 6500K	16W	160LM/W	2560LM/M	D



# 2835 240LED/M

MAX 175LM/W

★ High Lumen ★

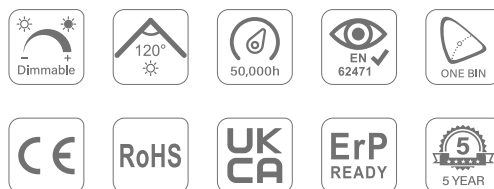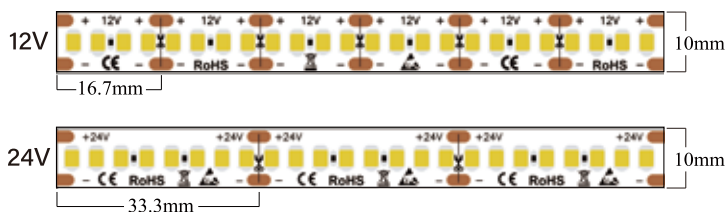

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW240-24-5YC	DC 24V	RA>80	● 2700K	22W	160LM/W	3520LM/M	D
SELS-2835WW240-24-5YC	DC 24V	RA>80	● 3000K	22W	165LM/W	3630LM/M	D
SELS-2835NW240-24-5YC	DC 24V	RA>80	● 4000K	22W	175LM/W	3850LM/M	C
SELS-2835PW240-24-5YC	DC 24V	RA>80	○ 6500K	22W	170LM/W	3740LM/M	D
SELS-2835WW240-12/24-5Y	DC 12/24V	RA>80	● 2700K	22W	145LM/W	3190LM/M	E
SELS-2835WW240-12/24-5Y	DC 12/24V	RA>80	● 3000K	22W	150LM/W	3300LM/M	E
SELS-2835NW240-12/24-5Y	DC 12/24V	RA>80	● 4000K	22W	160LM/W	3520LM/M	D
SELS-2835PW240-12/24-5Y	DC 12/24V	RA>80	○ 6500K	22W	160LM/W	3520LM/M	D





SDCM3 / SDCM 5, CRI 80/90/95, CCT Range: 1600~30000K Available to Customize



# 2835 60LED/M

## ULTRA SLIM SERIES

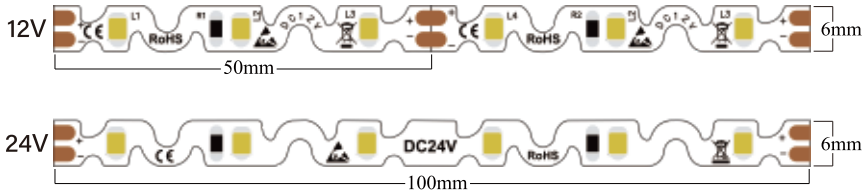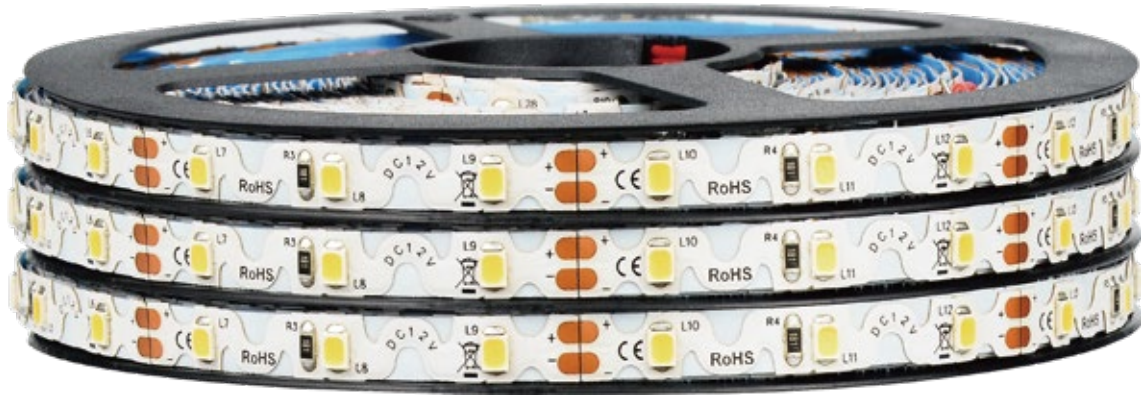


Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW60-12/24-YS	DC 12/24V	RA>80	● 2700K	5W	110LM/W	550LM/M	F
SELS-2835WW60-12/24-YS	DC 12/24V	RA>80	● 3000K	5W	110LM/W	550LM/M	F
SELS-2835NW60-12/24-YS	DC 12/24V	RA>80	● 4000K	5W	120LM/W	600LM/M	E
SELS-2835PW60-12/24-YS	DC 12/24V	RA>80	○ 6500K	5W	110LM/W	550LM/M	F
SELS-2835WW60-12/24-YS	DC 12/24V	RA>90	● 2700K	5W	105LM/W	525LM/M	F
SELS-2835WW60-12/24-YS	DC 12/24V	RA>90	● 3000K	5W	105LM/W	525LM/M	F
SELS-2835NW60-12/24-YS	DC 12/24V	RA>90	● 4000K	5W	115LM/W	575LM/M	F
SELS-2835PW60-12/24-YS	DC 12/24V	RA>90	○ 6500K	5W	105LM/W	525LM/M	F



# 2835 128LED/M

## ULTRA SLIM SERIES

★ High Lumen ★

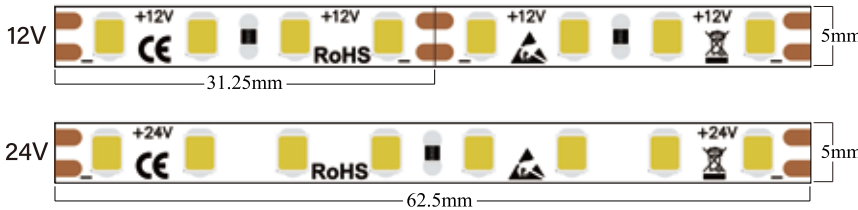

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW128-12/24-YC	DC 12/24V	RA>80	● 2700K	5W	155LM/W	775LM/M	D
SELS-2835WW128-12/24-YC	DC 12/24V	RA>80	● 3000K	5W	160LM/W	800LM/M	D
SELS-2835NW128-12/24-YC	DC 12/24V	RA>80	● 4000K	5W	170LM/W	850LM/M	D
SELS-2835PW128-12/24-YC	DC 12/24V	RA>80	○ 6500K	5W	165LM/W	825LM/M	D
SELS-2835WW128-12/24-YC	DC 12/24V	RA>90	● 2700K	5W	125LM/W	625LM/M	E
SELS-2835WW128-12/24-YC	DC 12/24V	RA>90	● 3000K	5W	130LM/W	650LM/M	E
SELS-2835NW128-12/24-YC	DC 12/24V	RA>90	● 4000K	5W	140LM/W	700LM/M	E
SELS-2835PW128-12/24-YC	DC 12/24V	RA>90	○ 6500K	5W	135LM/W	675LM/M	E



SDCM3 / SDCM 5, CRI 80/90/95, CCT Range: 1600~30000K Available to Customize


# 2835 70&126&238LED/M

## 24V CONSTANT CURRENT SERIES


★ Max 50mt ★




IC Build-in LED Max 50mt  
SELS-2835X70-24-YCC



IC Build-in LED Max 40mt  
SELS-2835X126-24-YCC



IC Build-in LED Max 30mt  
SELS-2835X238-24-YCC



Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW70-24-YCC	DC 24V	RA>80	2700K	6W	125LM/W	750LM/M	E
SELS-2835WW70-24-YCC	DC 24V	RA>80	3000K	6W	130LM/W	780LM/M	E
SELS-2835NW70-24-YCC	DC 24V	RA>80	4000K	6W	140LM/W	840LM/M	E
SELS-2835PW70-24-YCC	DC 24V	RA>80	6500K	6W	140LM/W	840LM/M	E
SELS-2835WW126-24-YCC	DC 24V	RA>80	2700K	11W	120LM/W	1320LM/M	E
SELS-2835WW126-24-YCC	DC 24V	RA>80	3000K	11W	130LM/W	1430LM/M	E
SELS-2835NW126-24-YCC	DC 24V	RA>80	4000K	11W	135LM/W	1485LM/M	E
SELS-2835PW126-24-YCC	DC 24V	RA>80	6500K	11W	140LM/W	1540LM/M	E
SELS-2835WW238-24-YCC	DC 24V	RA>80	2700K	20W	120LM/W	2400LM/M	E
SELS-2835WW238-24-YCC	DC 24V	RA>80	3000K	20W	125LM/W	2500LM/M	E
SELS-2835NW238-24-YCC	DC 24V	RA>80	4000K	20W	130LM/W	2600LM/M	E
SELS-2835PW238-24-YCC	DC 24V	RA>80	6500K	20W	140LM/W	2800LM/M	E





# 2835 60&120&240LED/M

## 48V CONSTANT CURRENT SERIES

★ Max 100mt ★




Max 100mt  
SELS-2835X60-48-YCC



Max 60mt  
SELS-2835X120-48-YCC



Max 50mt  
SELS-2835X240-48-YCC

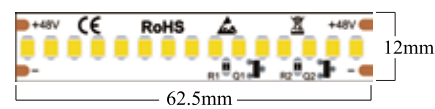

Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835WW60-48-YCC	DC 48V	RA>80	2700K	4W	145LM/W	580LM/M	E
SELS-2835WW60-48-YCC	DC 48V	RA>80	3000K	4W	150LM/W	600LM/M	D
SELS-2835NW60-48-YCC	DC 48V	RA>80	4000K	4W	155LM/W	620LM/M	D
SELS-2835PW60-48-YCC	DC 48V	RA>80	6500K	4W	155LM/W	620LM/M	D
SELS-2835WW120-48-YCC	DC 48V	RA>80	2700K	10W	145LM/W	1450LM/M	E
SELS-2835WW120-48-YCC	DC 48V	RA>80	3000K	10W	150LM/W	1500LM/M	D
SELS-2835NW120-48-YCC	DC 48V	RA>80	4000K	10W	155LM/W	1510LM/M	D
SELS-2835PW120-48-YCC	DC 48V	RA>80	6500K	10W	150LM/W	1500LM/M	D
SELS-2835WW240-48-YCC	DC 48V	RA>80	2700K	16W	145LM/W	2320LM/M	E
SELS-2835WW240-48-YCC	DC 48V	RA>80	3000K	16W	150LM/W	2400LM/M	D
SELS-2835NW240-48-YCC	DC 48V	RA>80	4000K	16W	155LM/W	2480LM/M	D
SELS-2835PW240-48-YCC	DC 48V	RA>80	6500K	16W	155LM/W	2480LM/M	D





# RGBW & RGB+CCT 60LED/M

## CONSTANT CURRENT SERIES

★ Max 40mt ★



SELS-5050RGBX60-24-IP20CC

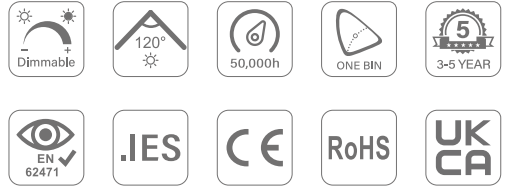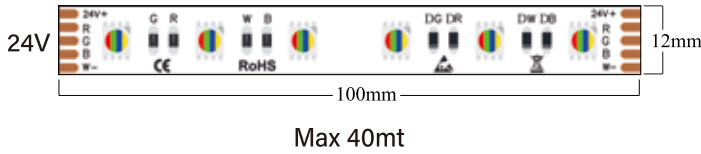


Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	MAGIC Color
SELS-5050RGBX60-24-IP20CC	DC 24V	11W	60PCS	12mm	4 Oz Double layer	RGBW

★ Max 30mt ★



SELS-5050RGCCT60-24-YCC

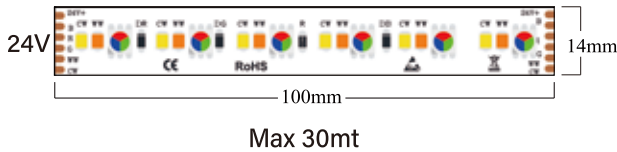

Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	MAGIC Color
SELS-5050RGCCT60-24-YCC	DC 24V	16W	180PCS	14mm	4 Oz Double layer	RGCCT


# CCT 216 & RGB 60LED/M

## CONSTANT CURRENT SERIES

★ Max 30mt ★



SELS-2835CCT216-24-YCC

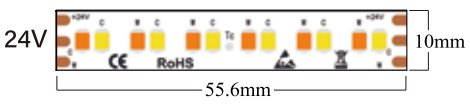

IC Build-in LED Max 30mt


- Dimmable
- 120°
- 50,000h
- ONE BIN
- 5 3-5 YEAR
- EN 62471
- .IES
- CE
- RoHS
- UK CA

Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	CCT
SELS-2835CCT216-24-YCC	DC 24V	14W	216PCS	10mm	4 Oz Double layer	CCT

★ Max 40mt ★



SELS-5050RGB60-24-YCC

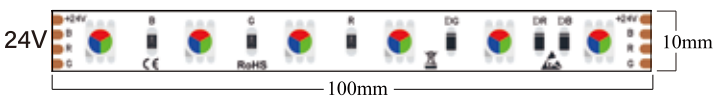

Max 40mt


- Dimmable
- 120°
- 50,000h
- EN 62471
- CE
- RoHS
- UK CA
- 5 3-5 YEAR

Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	MAGIC Color
SELS-5050RGB60-24-YCC	DC 24V	8W	60PCS	10mm	4 Oz Double layer	RGB



# 2835 CCT 224LED/M

## 112PCS 3000K+112PCS 6500K



Model No.	Voltage	CRI	CCT	Watt/M	Efficiency ±10%	Lumen ±10%	Energy Efficiency Class
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>80	● 3000K	12W	145LM/W	1740LM/M	E
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>80	○ 6500K	12W	150LM/W	1800LM/M	D
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>80	●○ 4000K	24W	145LM/W	3480LM/M	E
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>90	● 3000K	12W	115LM/W	1380LM/M	F
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>90	○ 6500K	12W	120LM/W	1440LM/M	E
SELS-2835CCT224-12/24-Y	DC 12/24V	RA>90	●○ 4000K	24W	115LM/W	1380LM/M	F

3000K

4000K


6500K

# 5050 RGB 60&84LED/M



## RGB SERIES



SELS-5050RGB60-12-Y





SELS-5050RGB60-24-Y

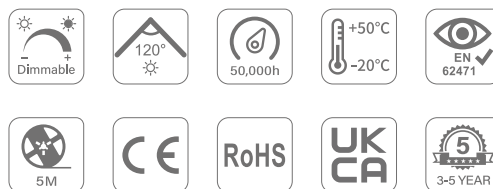

Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	MAGIC Color
SELS-5050RGB60-12/24-Y	DC 12/24V	14W	60PCS 5050	10mm	2 Oz Double layer	RGB



SELS-5050RGB84-24-Y

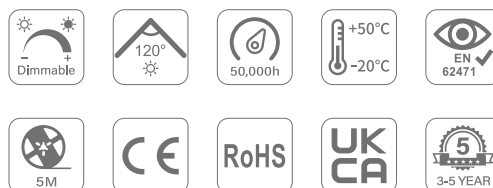

Model No.	Voltage	Watt/M	LED Type	FPC	FPC Thickness	MAGIC Color
SELS-5050RGB84-24-Y	DC 24V	14W	84PCS 2835	10mm	2 Oz Double layer	RGB


# RGBW 60UNIT/M

## RGB+W 4IN 1 & RGB+2216WHITE


 RGBWW
  RGBNW
  RGBPW



SELS-5050RGBX60-12-YA



SELS-5050RGBX60-24-YA





Model No.	Voltage	Watt/M	FPC	FPC Thickness	Color&CCT	LED Type
SELS-5050RGBX60-12/24-YA	DC 12/24V	17W	12mm	2 Oz Double layer	 RGBW	60PCS

 RGBWW
  RGBNW
  RGBPW



SELS-5050RGBX60-24-YB

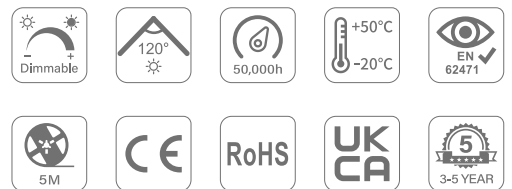

Model No.	Voltage	Watt/M	FPC	FPC Thickness	Color&CCT	LED Type
SELS-5050RGBX60-24-YB	DC 24V	17W	12mm	2 Oz Double layer	 RGBWW	120PCS





# RGB CCT 60UNIT/M

RGB+W 5 IN 1 & RGB+2216WHITE




SELS-5050RGBCCT60-24-YA

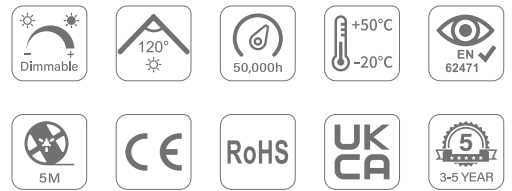

Model No.	Voltage	Watt/M	FPC	FPC Thickness	Color&CCT	LED Type
SELS-5050RGBCCT60-24-YA	DC 24V	22W	12mm	3 Oz Double layer	RGBCCT	60PCS



SELS-5050RGBCCT60-24-YB



Model No.	Voltage	Watt/M	FPC	FPC Thickness	Color&CCT	LED Type
SELS-5050RGBCCT60-24-YB	DC 24V	20W	14mm	3 Oz Double layer	RGBCCT	180PCS



# IP65/IP66 LED TRI-PROOF LIGHT

Can be OEM and ODM for you, Silver Color or Black Color, can Laser your LOGO onto the product.

1. High Lumen output up to 135lm/w &150lm/w.
2. High Impact IK08/IK10 Test.
3. Quick Start instant 100% luminous flux.
4. Normal Type, Flicker Free, 0-10V Dimmable, Dali Dimmable, Emergency, Sensor Type for options.
5. Lower maintenance cost thanks to over 3 times longer lifetime.
6. Long lifespan 50,000 hours, 5 years warranty, Energy saving up to 80%.
7. LED Tri-Proof Light can provide perfect lighting solution for Basement Parking, supermarket, stores, warehouses, workshop, office etc.

# IP65 LED TRI-PROOF LIGHT

20W/40W/50W/60W

● Black ○ White

Normal Connector



Fast 3 Pin Connector



Fast 5 Pin Connector




Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SE-2T20W	AC 100-277V/220-240V	20W	RA>80	L600*W85*H74MM	130LM/W	2600LM
SE-4T40W	AC 100-277V/220-240V	40W	RA>80	L1200*W85*H74MM	130LM/W	5200LM
SE-4T50W	AC 100-277V/220-240V	50W	RA>80	L1200*W85*H74MM	130LM/W	6500LM
SE-5T50W	AC 100-277V/220-240V	50W	RA>80	L1500*W85*H74MM	130LM/W	6500LM
SE-5T60W	AC 100-277V/220-240V	60W	RA>80	L1500*W85*H74MM	130LM/W	7800LM

2700K 3000K 4000K 5000K 6500K





# Mini TYPE LED TRI-PROOF LIGHT

20W/30W/40W/50W

● Black ○ White

Normal Connector

Fast 3 Pin Connector

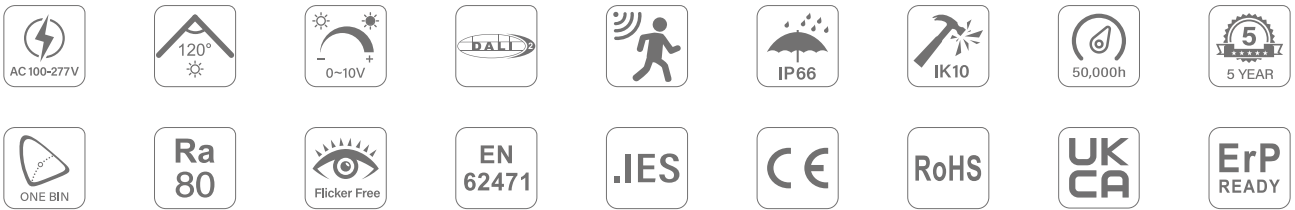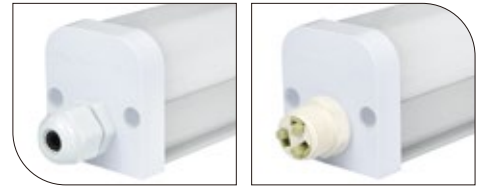

Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SE-2T20W-M	AC 100-277V/220-240V	20W	RA>80	L600*W45*H49MM	135LM/W	2700LM
SE-4T20W-M	AC 100-277V/220-240V	20W	RA>80	L1200*W45*H49MM	135LM/W	2700LM
SE-4T30W-M	AC 100-277V/220-240V	30W	RA>80	L1200*W45*H49MM	135LM/W	4050LM
SE-4T40W-M	AC 100-277V/220-240V	40W	RA>80	L1200*W45*H49MM	135LM/W	5400LM
SE-5T50W-M	AC 100-277V/220-240V	50W	RA>80	L1500*W45*H49MM	135LM/W	6750LM



# P TYPE LED TRI-PROOF LIGHT

20W/30W/40W/50W

● Black ○ White

Normal Connector

Fast 3 Pin Connector



Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SE-2T20W-P	AC 100-277V/220-240V	20W	RA>80	L600*W71*H55MM	130LM/W	2600LM
SE-4T20W-P	AC 100-277V/220-240V	20W	RA>80	L1200*W71*H55MM	130LM/W	2600LM
SE-4T30W-P	AC 100-277V/220-240V	30W	RA>80	L1200*W71*H55MM	130LM/W	3900LM
SE-4T40W-P	AC 100-277V/220-240V	40W	RA>80	L1200*W71*H55MM	130LM/W	5200LM
SE-5T50W-P	AC 100-277V/220-240V	50W	RA>80	L1500*W71*H55MM	130LM/W	6500LM





# LED LINEAR LIGHT

**Can be OEM and ODM for you, Silver Color or Black Color, can Laser your LOGO onto the product.**


1. High lumen efficiency 150 LM/W
2. Linkable with no space in between
3. Extrusion aluminum lamp body and lens cover
4. Flicker Free Lifud Driver
5. Maximum 1.5M Long for single product
6. Low light decay, L70=50,000 Hours
7. Single use or linkable connection, Suspended or ceiling installation
8. Clear Lens 30° / 60° / 90° / Double Asymmetric / Milky PC 120° option
9. LED Linear Light can provide perfect lighting solution for supermarket, stores, warehouses, work shop, office and any indoor working place where require high quality light distribution.




# LED LINEAR LIGHT

20W/40W/50W/60W

Silver
  Black
  White

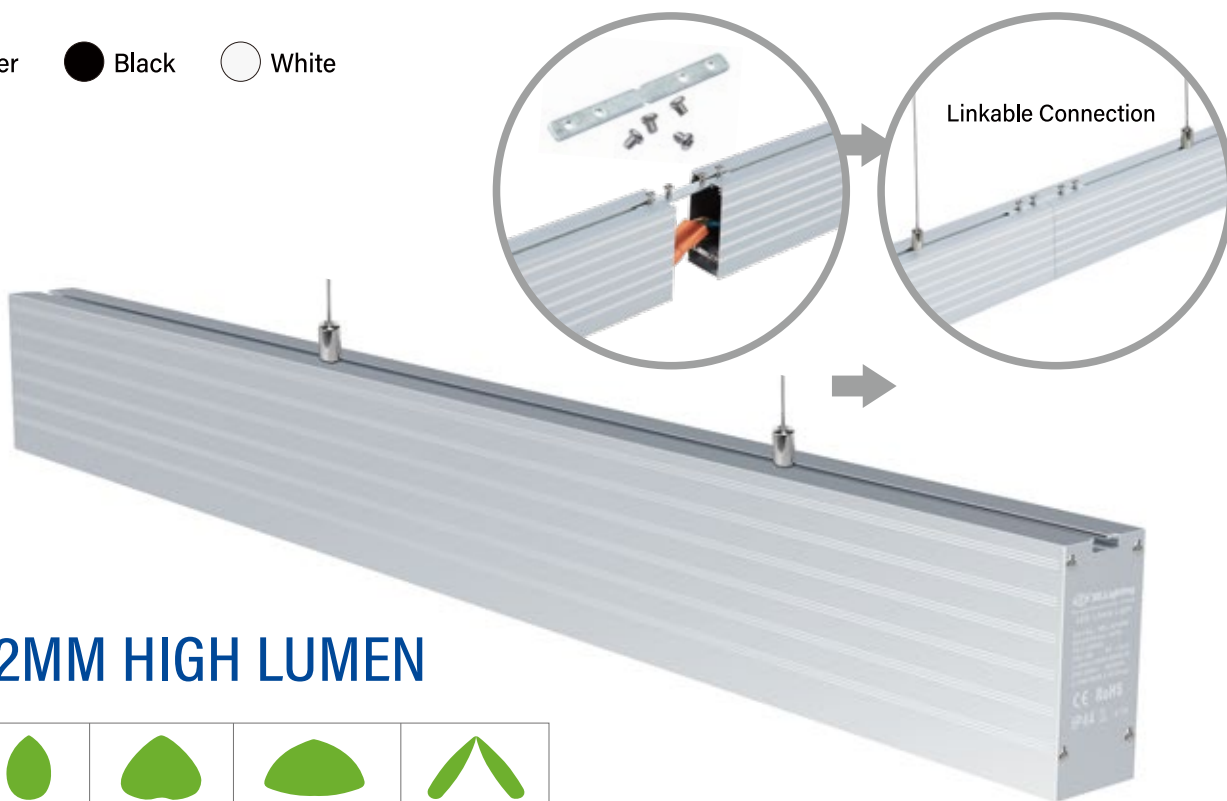

## 70\*32MM HIGH LUMEN



30°
60°
90°
120°
Double Asymmetric



Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SEL-2T20W	AC 100-277V/220-240V	20 W	RA>80	L590*H70*W32mm	150LM/W	3000LM
SEL-4T40W	AC 100-277V/220-240V	40 W	RA>80	L1180*H70*W32mm	150LM/W	6000LM
SEL-4T50W	AC 100-277V/220-240V	50 W	RA>80	L1180*H70*W32mm	150LM/W	7500LM
SEL-5T50W	AC 100-277V/220-240V	50 W	RA>80	L1480*H70*W32mm	150LM/W	7500LM
SEL-5T60W	AC 100-277V/220-240V	60 W	RA>80	L1480*H70*W32mm	150LM/W	9000LM





# LED STREET LIGHT

**Can be OEM and ODM for you, Silver Color or Black Color, can Laser your LOGO onto the product.**


1. Aluminum Alloy Housing, simple and stylish appearance;
2. Large heat dissipation area, good heat dissipation for long life performance;
3. High temperature resistant tempered glass, surface baking process, strong corrosion resistance and durability;
4. Protection of the lamp shell is up to IP66, rugged all weather IP Construction;
5. Use super brighter 3030smd to obtain high light efficiency, 130 lumens per watt;
6. Suitable for Parking Lights, Road Lighting, Ramp Lighting, Sidewalk Lighting, Campus Lighting, Highway lighting and other outdoor places.

# LED STREET LIGHT

50W/75W/100W/150W/200W/300W



L TYPE



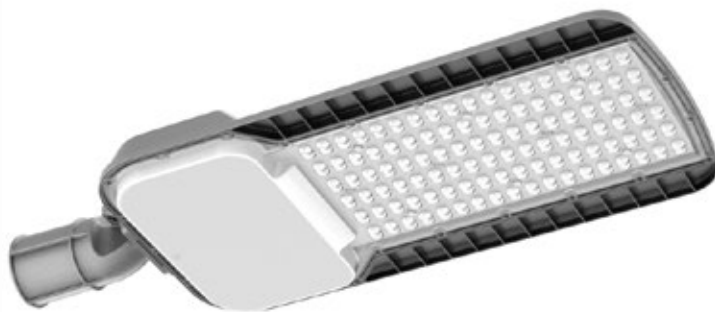


P TYPE

TUV/Meanwell Driver, Lumileds LED



The Light Sensor  
Optional

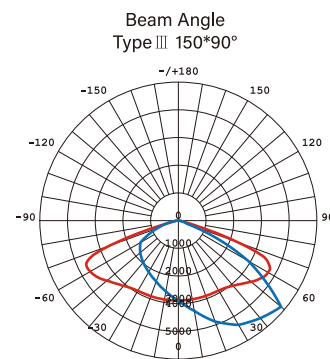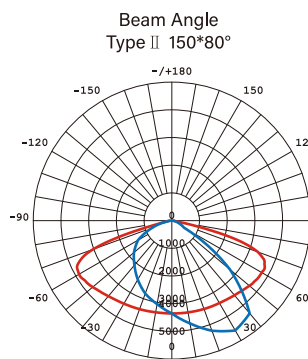

Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SES-W50	AC 100-240V	50W	RA>80	L560*W196*H99mm	150LM/W	7500LM
SES-W75	AC 100-240V	75W	RA>80	L560*W196*H99mm	150LM/W	11250LM
SES-W100	AC 100-240V	100W	RA>80	L610*W245*H99mm	150LM/W	15000LM
SES-W150	AC 100-240V	150W	RA>80	L660*W245*H99mm	150LM/W	22500LM
SES-W200	AC 100-240V	200W	RA>80	L712*W300*H99mm	150LM/W	30000LM
SES-W300	AC 100-240V	300W	RA>80	L714*W340*H99mm	150LM/W	45000LM







# UFO LED HIGH BAY LIGHT

**Can be OEM and ODM for you, Silver Color or Black Color, can Laser your LOGO onto the product.**


1. With light cooling fins, Massive radiation fins, the cost of shipping, assembling and maintaining lowered sharply;
2. Using 1060 aluminum, the aluminum content of 99.6%; good thermal conductivity, corrosion resistance;
3. The protection grade is IP65 and can be used outdoors;
4. Use super brighter 2835smd to obtain high light efficiency, 150~160 lumens per watt;
5. 5 Years Warranty.

Widely used high-bay lighting factories, workshops, warehouses, logistics centers, exhibitionhalls, stadiums, shipyards, mines, highway toll stations, gas stations, farmers markets and the like

# LED HIGH BAY LIGHT

100W/150W/200W

Silver
  Black

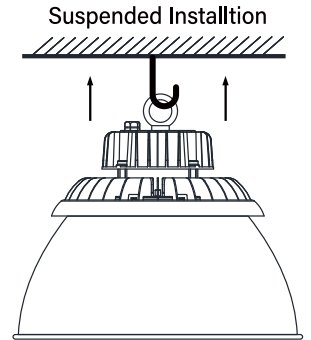

60°

90°

120°

TUV/Meanwell Driver, Lumileds LED



Model No.	Input Voltage	Power	CRI	Size/mm	Efficiency ±10%	Luminous ±10%
SEH-100W	AC 100-277V	100W	RA>80	Φ258mm*H109mm	150LM/W	15000LM
SEH-150W	AC 100-277V	150W	RA>80	Φ299mm*H109mm	150LM/W	22500LM
SEH-200W	AC 100-277V	200W	RA>80	Φ347mm*H112mm	150LM/W	30000LM

3000K
4000K
5000K
6500K



## SHENZHEN STANDARD TECHNOLOGY CO., LTD STANDARD ELECTRONIC CO., LIMITED

 3F, No.17, LangKou Industrial Park (WeiPengDa), LangKou Community, DaLang SubDistrict Office, LongHua District, ShenZhen, GuangDong 518109 China

 +86-755-23082153  +86-755-23082553  [sales@se.lighting](mailto:sales@se.lighting) [sales@se-led.com](mailto:sales@se-led.com)  [www.se.lighting](http://www.se.lighting)

 Steven Gao (General Manager) Mobile/WeChat/WhatsApp: +86-189 2341 9518